

**THIS PAGE IS INSERTED BY OIPE SCANNING
AND IS NOT PART OF THE OFFICIAL RECORD**

Best Available Images

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

BLACK BORDERS

TEXT CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT

BLURRY OR ILLEGIBLE TEXT

SKEWED/SLANTED IMAGES

COLORED PHOTOS HAVE BEEN RENDERED INTO BLACK AND WHITE

VERY DARK BLACK AND WHITE PHOTOS

UNDECIPHERABLE GRAY SCALE DOCUMENTS


**IMAGES ARE THE BEST AVAILABLE
COPY. AS RESCANNING *WILL NOT*
CORRECT IMAGES, PLEASE DO NOT
REPORT THE IMAGES TO THE
PROBLEM IMAGE BOX.**



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C04B 35/00	A2	(11) International Publication Number: WO 00/02829 (43) International Publication Date: 20 January 2000 (20.01.00)
(21) International Application Number: PCT/US99/14231 (22) International Filing Date: 23 June 1999 (23.06.99) (30) Priority Data: 09/112,639 9 July 1998 (09.07.98) US (71) Applicant: KENNAMETAL INC. [US/US]; P.O. Box 231, Latrobe, PA 15650-0231 (US). (72) Inventor: YECKLEY, Russell, L.; 110 Branwell Drive, Latrobe, PA 15650 (US). (74) Agents: PRIZZI, John, J. et al.; Kennametal Inc., P.O. Box 231, Latrobe, PA 15650-0231 (US).		(81) Designated States: BR, CA, IL, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: CERAMIC AND PROCESS FOR THE CONTINUOUS SINTERING THEREOF

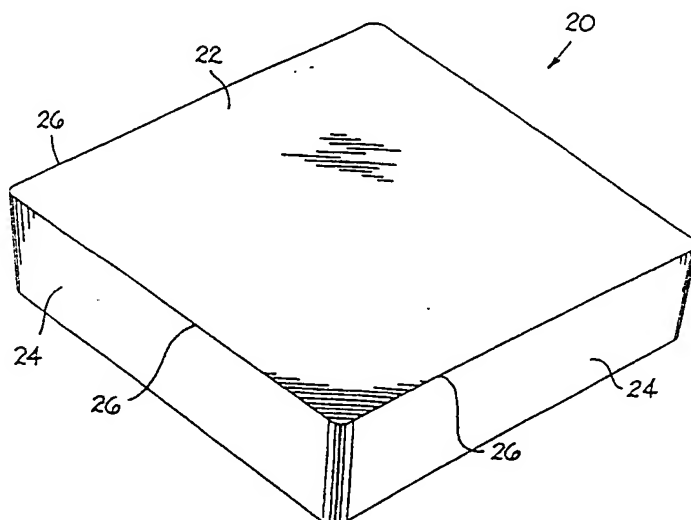

(57) Abstract

A continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of: forming a green compact from a powder mixture comprising a first component comprising compounds which contain elements of silicon, aluminum, oxygen and nitrogen; and the powder mixture further comprising a second component comprising a compound of at least one element selected from the group consisting of yttrium, scandium, cerium, lanthanum and the metals of the lanthanide series, and the second component comprising between 0.1 and 10 weight percent of the powder mixture; heat treating the green compact wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to produce a sintered compact.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

CERAMIC AND PROCESS FOR
THE CONTINUOUS SINTERING THEREOF

BACKGROUND

5 The invention pertains to a continuous heat treating (e.g., sintering) process for the production of ceramics, as well as the resulting ceramic wherein these ceramics may be used as cutting inserts, nozzles, wear parts and the like.

10 In the past, ceramics have been produced using a batch process. These ceramics have included silicon nitride-based ceramics, SiAlON-based ceramics, alumina-based ceramics, zirconia-based ceramics, titanium nitride-based ceramics, titanium carbide-based ceramics, and titanium carbonitride-based ceramics.
15 These ceramics have also optionally contained additives which included whiskers such as, for example, silicon carbide, titanium carbide and/or titanium nitride whiskers so as to provide for whisker-reinforced ceramics. These additives have also comprised
20 zirconia, as well as the nitrides, carbides, borides and carbonitrides of titanium, hafnium and zirconium.

 Referring specifically to SiAlON materials, SiAlON-based ceramics have been produced using a batch process. U.S. Patent No. 4,563,433 to Yeckley et al.
25 for a Ceramic Material and Method of Manufacture (which is hereby incorporated by reference herein) describes such a batch process wherein a plurality of green compacts are buried in a boron nitride/silicon nitride setting powder mixture in a graphite pot. The pot,
30 setting powder and green compacts are placed in a graphite element resistance-heated batch furnace, and then subjected to a heat treatment (e.g., sintering) process. The result is a densified SiAlON-based ceramic made according to a batch process.

35 U.S. Patent No. 5,382,273 to Mehrotra et al. for a Silicon Nitride Ceramic and Cutting Tools Made

5 Thereof, U.S. Patent No. 5,370,716 to Mehrotra et al.
for a High Z SiAlON and Cutting Tools Made Therefrom
and Method of Using, and U.S. Patent No. 5,525,134 to
10 Mehrotra et al. for a Silicon Nitride Ceramic and
Cutting Tool Made Thereof (all of these patents are
hereby incorporated by reference herein) each pertain
to ceramics made via a batch process. Although the
batch-processed ceramics have adequate physical
15 properties and performance characteristics for
applications such as cutting inserts, these ceramics
still exhibit certain disadvantages.

 Some SiAlON-based ceramics, e.g., cutting
inserts, as well as silicon nitride-based ceramics
(e.g., cutting inserts), must present a uniform
15 appearance on their surface so as to be visually
pleasing. During the batch process, a reaction layer
forms on and near the surface of the cutting insert.
In batch processing, this surface reaction layer
typically has a nominal thickness between about
20 .010 inches (.254 millimeters [mm]) and about
.015 inches (.381 mm). This surface reaction layer
causes a change in the color of the surface of the
cutting insert so that a batch-processed SiAlON-based
or silicon nitride-based cutting insert does not
25 exhibit a uniform surface color or appearance. In
order to obtain the desired uniform surface appearance,
the surface of the batch-processed cutting insert must
be ground at least .010-.015 inches so as to remove the
surface reaction layer. There would be a significant
30 cost savings associated with a process that would
eliminate the necessity for the above-described
grinding step. There would also be a significant cost
savings associated with a process that would reduce the
amount of grinding necessary to achieve an acceptable
35 surface appearance from the amount of grinding required
for a batch-processed cutting insert.

5 The process for making a batch-processed ceramic part (e.g., a cutting insert) requires that the ceramic part be physically removed from the tray in which it was delubed, and then physically placed in the tray in which it is batch processed. It is apparent that this transfer step adds an additional step, as well as labor costs, to the overall batch process. It would be desirable to be able to provide a process in which the ceramic part remained in the same container or tray from the delubing operation through the sintering operation. Such an advantage would reduce the number of manufacturing steps and the amount of labor needed in the production of a ceramic part.

SUMMARY

15 In one form thereof, the invention is a continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of: forming a green compact from a powder mixture comprising a first component comprising compounds which contain elements of silicon, aluminum, oxygen and nitrogen; and the powder mixture further comprising a second component comprising a compound of at least one element selected from the group consisting of yttrium, scandium, cerium, lanthanum and the metals of the lanthanide series, and the second component comprising between 0.1 and 10 weight percent of the powder mixture; heat treating the green compact wherein the heat treatment comprises: continuously passing the green compact through at least one heating zone so as to produce a sintered compact.

20 In another form thereof, the invention is a continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of: forming a green compact from a powder mixture of silicon nitride and one or more sintering aids;

5 subjecting the green compact to a heat treatment wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to form the sintered compact and wherein the heating zone is at a temperature greater than 1750 °C; and the ceramic comprising a beta-silicon nitride phase and an intergranular phase.

10 In still another form thereof, the invention is a ceramic cutting insert which comprises a cutting insert body which has an as-molded rake face and an as-molded flank face wherein the rake face intersects with the flank face to form a cutting edge at the intersection. The cutting body has at least one of the as-molded rake face and the as-molded flank face does not have a surface reaction layer.

15 In still another form thereof, the invention is a ceramic cutting insert that comprises a cutting insert body which has a microstructure including pockets of a glassy phase. At least ninety percent of the pockets of the glassy phase have a major axis which is of a dimension of one micron or less.

20 In another form thereof, the invention is a sintered ceramic body which comprises a substrate that comprises a two-phase composite of alpha'-SiAlON and beta'SiAlON, and a glassy phase. The substrate presents a surface. The substrate has a surface region extending inwardly from the surface with a bulk region beneath the surface region. The surface region has a higher alpha'-SiAlON content than the bulk region.

30 BRIEF DESCRIPTION OF THE DRAWINGS

The following is a brief description of the drawings which form a part of this patent application:

FIG. 1 is an isometric view of an embodiment of a ceramic cutting insert of the instant invention;

FIG. 2 is a box and whisker plot showing the fracture toughness [$K_{Ic}(E\&C)$] ($\text{MPa m}^{1/2}$) versus the belt speed (inches per minute) for continuously-processed SiAlON based sintered compacts of Composition B;

5 FIG. 3 is a photomicrograph at a magnification of 11X of a polished cross-section of a continuously-processed SiAlON-based sintered compact of Composition B sintered at a temperature of 1800 °C for sixty minutes and wherein the photomicrograph shows the surface of the sintered compact;

10 FIG. 4 is a photomicrograph at a magnification of 11X of a polished cross-section of a continuously-processed SiAlON-based sintered compact of Composition B sintered at a temperature of 1760 °C for one hundred twenty minutes and wherein the photomicrograph shows the surface of the sintered compact;

15 FIG. 5 is a box and whisker plot showing the Vickers hardness (GPa) [18.5 Kg Load] verses the sintering temperature (°C) for continuously-processed SiAlON-based sintered compacts of Composition A;

20 FIG. 6 is a box and whisker plot showing the fracture toughness $K_{Ic}(E\&C)$ ($\text{MPa m}^{1/2}$) versus the sintering temperature (°C) for continuously-processed SiAlON-based sintered compacts of Composition A;

25 FIG. 7 is a box and whisker plot showing the fracture toughness $K_{Ic}(E\&C)$ ($\text{MPa m}^{1/2}$) verses the belt speed (inches per minute) for continuously-processed SiAlON-based sintered compacts of Composition A;

30 FIG. 8 is a photomicrograph at a magnification of 11X of a polished cross-section of a continuously-processed SiAlON-based sintered compact of Composition A sintered at a temperature of 1800 °C for sixty minutes and wherein the photomicrograph shows the surface of the sintered compact;

35 FIG. 9 is a photomicrograph at a magnification of 11X of a polished cross-section of a

continuously-processed SiAlON-based sintered compact of Composition A sintered at a temperature of 1760 °C for one hundred twenty minutes and wherein the photomicrograph shows the surface of the sintered compact;

FIG. 10 is a photomicrograph at a magnification of 11X of a polished cross-section of a continuously-processed SiAlON-based sintered compact of Composition B sintered at 1760 °C for sixty minutes and wherein the photomicrograph shows the surface of the sintered compact;

FIG. 11 is a photomicrograph at a magnification of 3560X (the width of the photomicrograph is 34 micrometers) of the microstructure of a continuously-processed SiAlON-based sintered compact of Composition B;

FIG. 12 is a photomicrograph at a magnification of 3560X (the width of the photomicrograph is 34 micrometers) of the microstructure of a batch-processed SiAlON-based sintered compact of composition B;

FIG. 13 is a box and whisker plot showing the dimension (microns) of the major axis of glass pockets for a continuously-processed (belt-sintered) SiAlON-based cutting insert of composition B and a batch-processed SiAlON-based cutting insert of Composition B;

FIG. 14 is an isometric view of a belt sintering furnace used for the continuous processing of green compacts into sintered compacts; and

FIG. 15 is an X-ray diffraction pattern of a partially exposed surface of a cutting insert of Composition A held at 1800 °C for 120 minutes;

FIG. 16 is an X-ray diffraction pattern of an exposed surface of a cutting insert of Composition A held at 1800 °C for 120 minutes; and

FIG. 17 is an X-ray diffraction pattern of the bulk of a cutting insert of Composition A held at 1800 °C for 120 minutes.

DETAILED DESCRIPTION

5 Referring to the drawings, there is shown in FIG. 1 a ceramic cutting insert generally designated 20. Cutting insert 20 has a rake surface 22, and flank surfaces 24. There are cutting edges 26 at the intersections of the rake surface 22 and the flank surfaces. The rake face and the flank face (or both) may be in an as-molded condition. The cutting insert of the instant invention may take on any one of a variety of cutting insert geometries so that the scope of the instant invention is not intended to be limited to the geometry of the specific cutting insert illustrated in FIG. 1. This description is of a cutting insert, however, the invention has application to other kinds of ceramic parts such as nozzles, wear parts, and the like. In addition to SiAlON-based and silicon nitride-based materials, the ceramic cutting inserts, as well as the process for making such ceramic cutting inserts, pertain without limitation to ceramic materials such as, for example, alumina, alumina-based ceramics (e.g., alumina+titanium carbide, alumina+zirconia, alumina+zirconia+silicon carbide whiskers, and alumina+silicon carbide whiskers), zirconia, zirconia-based ceramics, titanium carbide-based ceramics, titanium nitride-based ceramics, titanium carbonitride-based ceramics (e.g., titanium carbonitride+silicon carbide whiskers+alumina), titanium boride-based ceramics, hafnium boride-based ceramics, and zirconium boride-based ceramics, and the like.

35 As discussed above in the background, it would be advantageous to provide a process for the

production of ceramics (including SiAlON-based and silicon nitride-based ceramics) that would eliminate the need for a post-sintering (or heat treating) grinding (or material removal) step so as to remove the surface reaction layer so as to provide an acceptable surface appearance. It would also be advantageous to provide a process for the production of ceramics (including SiAlON-based and silicon nitride-based ceramic cutting inserts) that would result in a much thinner surface reaction layer so as to thereby reduce the amount of grinding necessary to remove the surface reaction layer so as to provide an acceptable surface appearance. It would also be advantageous to provide a process for the production of ceramics (including SiAlON-based and silicon nitride-based ceramic cutting inserts) that would eliminate the need to physically transfer the delubed green compacts to another container or tray for subsequent sintering.

In an effort to achieve these advantages with a process for the production of a SiAlON-based or a silicon nitride-based ceramic, the applicant has discovered that the continuous sintering of green compacts produces a fully densified SiAlON-based (or silicon nitride-based) sintered compact which either has an acceptable surface condition without the need to remove (e.g., grind) any material (e.g., a reaction layer) from the surface thereof or has a much thinner surface reaction layer than what existed in batch-processed ceramic parts. In the case of the continuously-processed sintered compact with the thinner surface reaction layer, less grinding is required to achieve an acceptable surface appearance than for the batch-processed sintered compact. In this regard, the batch-processed sintered compact typically required .010-.015 inches (.254-381 mm) of grinding while the continuously-processed cutting insert requires only .005 inches (.127 mm) or less of

grinding. Applicant's continuous process also eliminates the need to physically transfer the delubed green compact to another container for subsequent sintering since the compacts remain in the same container.

5 A number of examples of SiAlON-based ceramic green compacts were processed according to the continuous sintering process. The following description describes the continuously-processed green compacts and the batch-processed green compacts. In regard to the specific examples, the following definitions of the phases are applicable: (1) beta'-SiAlON phase is a hexagonal phase having the general formula $\text{Si}_{6-z}\text{Al}_z\text{O}_2\text{N}_{8-z}$ wherein z ranges between zero and about 4.2; (2) alpha'-SiAlON is a hexagonal phase having the general formula $(\text{Si},\text{Al})_{12}\text{M}_x(\text{O},\text{N})_{16}$ wherein M is Li, Ca, Y or some other lanthanide and X has a theoretical maximum value equal to 2 when M is Ca, but when M is Y, the practical maximum value of X is equal to 0.7; (3) alpha-silicon nitride is an unsubstituted allotrope of silicon nitride; (4) N-YAM is a monoclinic phase of the formula $\text{Y}_4\text{Si}_2\text{O}_7\text{N}_2$; (5) Y-N- α -Wollastonite is a monoclinic phase of the formula YsiO_2N ; and (6) YAG is a cubic phase of the formula $\text{Y}_3\text{Al}_5\text{O}_{12}$; and (7) B phase ($\text{Y}_2\text{SiAlO}_5\text{N}$).

In regard to the production of the green cutting insert compacts, the powder components are ball milled, dried, screened, and then agglomerated with a lubricant. This powder mixture is then uniaxially pressed into the green cutting insert compacts. These green cutting insert compacts are delubed in an oven, and after delubing are then continuously processed according to the continuous process of the invention. It should be appreciated that as an option for the continuous process, the delubing step may take place in a furnace that is in line with the sintering furnace so

that the green compacts are continuously delubed and sintered.

Referring to FIG. 14, the continuous process was conducted in a belt style furnace 30 wherein
5 furnace 30 is like the furnace set forth U.S. Patent No. 5,648,042 to Miller, Jr. entitled High-Temperature Belt Furnace Apparatus and Method of Using Same, which is hereby incorporated by reference herein. There are essentially three heating zones of the belt furnace
10 through which the parts move on a silicon carbide belt 32. The furnace preferably contains three heating zones; however, the number of heating zones may vary depending upon the particular application. Thus, the presence of three heating zones in the specific
15 embodiment of the furnace herein should not be considered limiting to the invention.

These heating zones are in a furnace region 34 and each one is twelve inches (30.48 centimeters [cm]) long. These heating zones comprise a
20 first heating zone 36 into which the parts first pass. The first heating zone 36 may be at any selected temperature, but it is preferable that the temperature in the first heating zone 36 be at or near the target sintering temperature. When the green compacts enter
25 the first heating zone they typically are heated at a rate of between 150 °C/minute and 200 °C/minute until they reach the temperature in the first heating zone.

The parts pass through the first heating zone 36 into the second heating zone 38. The second
30 heating zone 38 may be at any selected temperature, but typically is at the maximum (or target) sintering temperature for the process.

The parts pass through the second heating zone 38 into the third heating zone 40. The third
35 heating zone 40 may be at any selected temperature, but it is typical that the third heating zone is at a temperature equal to the temperature of the second

heating zone. It should be appreciated that the temperatures of the heating zones may vary depending upon the specific application. A nitrogen atmosphere is maintained in all three heating zones by introducing flowing nitrogen gas therein.

In the continuous process to produce the examples, the parts (e.g., green cutting insert compacts) were loaded into boron nitride saggers of three different sizes [as measured in inches] (4x4x1, and 4x4x2 and 4x8x4). These saggers each had lids loosely fitted on them. The use of lids avoided direct radiation heating of the compacts and minimized the volatilization of the constituent materials from the compacts. Setting powder was not used in this continuous process. The saggers and the green compacts were then continuously passed through the belt furnace 30. The end result was that the green compacts were transformed into fully densified SiAlON-based sintered compacts or cutting inserts, except for any necessary edge preparation.

Examples 1-36 use any one of three compositions, i.e., Composition A, Composition B, and Composition C. The powder components of the compositions is set forth in Table I below.

Table I
Components (Weight Percent) of Compositions A, B and C

Composition/ Component	Silicon Nitride	Aluminum Nitride	Alumina	Yttria
A	85.4	6.2	3.7	4.7
B	63.35	9.26	22.68	4.7
C	91.6	1.6	1.3	5.5

The powder components are briefly described as follows. For composition A, the silicon nitride was a lower purity nitrified silicon nitride available from Herman C. Starck of New York, New York (USA). For Compositions B and C, the silicon nitride was

Grade SNE10 silicon nitride powder from Ube Industries, Ltd. of Tokyo, Japan. For all of the compositions, the aluminum nitride was Grade C AlN powder available from Herman C. Starck, Inc. of New York, New York (USA).
5 For all of the compositions, the alumina was Grade Ceralox HPA 0.5 and is available from Ceralox Corporation of Tucson, Arizona (USA). For all of the compositions, the yttria powder was fine grade yttria from Herman C. Starck, Inc. of New York, New York
10 (USA). More detailed descriptions of these powders is found in U.S. Patent No. 5,370,716 to Mehrotra et al., which has already been incorporated by reference herein.

Referring to the processing of sintered compact Examples 1-6, Table II below sets forth the various processing parameters of the SiAlON-based sintered compacts of Composition A. Referring to Table I, the "Ex." refers to the examples, "T1" refers to the temperature (°C) in the first heating zone, "T2" refers to the temperature (°C) in the second heating zone, "T3" refers to the temperature (°C) in the third heating zone, the belt speed refers to the speed of the silicon carbide belt in inches per minute, and the total time in the heating zones is the sum of the time in minutes the compact spends in the three heating zones.

Table II
Processing Parameters for the SiAlON-Based
Sintered Compacts (Examples 1-6) of Composition A

Ex.	T1	T2	T3	Belt Speed (inches/ minute)	Total Time in the Heating Zones (minutes)
1	1720	1720	1720	0.6	60
2	1720	1720	1720	0.3	120
3	1760	1760	1760	0.6	60
4	1760	1760	1760	0.3	120
5	1800	1800	1800	0.6	60
6	1600	1760	1760	0.4	90

Table III below sets forth the physical properties of the as-sintered silicon nitride-based sintered compacts (Examples 1-6) of Composition A. The microstructure of the sintered compacts of Composition A is set forth in Table III below.

Table III
Physical Properties for the As-Sintered SiAlON-Based
Sintered Compacts (Examples 1-6) of Starting
Composition A

Example No.	Weight Loss (%)	Density (g/cc)	Vickers Hardness (GPa) [18.5 Kg Load]	Toughness K_{IC} (E&C) (MPa $m^{1/2}$)	Percent of Alpha' -SiAlON Phase Present*
1	0.6	3.24	16.30	5.93	20.1 ⁽¹⁾
2	0.63	3.25	16.29	6.41	20.6
3	0.73	3.24	16.16	6.40	19.2
4	0.95	3.25	16.29	6.69	22.5 ⁽²⁾
5	1.01	3.25	15.68	6.37	16.5
6	0.76	3.26	16.07	6.29	19.9

* The remainder of the phases comprises Beta'-SiAlON, except for glass and the phases noted in Notes (1) and (2) below. The reported percent is taken as a percent of the total crystalline phases as determined by X-ray diffraction.

(1) alpha-silicon nitride is present; and
(2) 1.6 weight percent YAM is present

In regard to the results of the continuous processing of the SiAlON-based sintered compacts of Composition A, the weight loss (as measured as a percentage of the weight of the green cutting insert compact) seemed to be dependent upon the temperature and the duration. The weight loss increased with the higher temperatures and with the longer sintering durations. It seems that the weight loss was due to volatization from the compact of some of the constituent material. The extent of the weight loss is comparable to the weight loss in batch-processed sintered compacts.

The density (as measured in grams per cubic centimeter) was essentially fully dense and comparable to the density of sintered compacts obtained by a batch process.

Referring to the box and whisker plot of FIG. 5, the Vickers hardness (18.5Kg Load), as measured in gigapascals [GPa], was dependent upon the temperature with the hardness decreasing at 1800 °C wherein a higher hardness was obtained at a sintering temperatures of either 1720 °C or 1760 °C.

Referring to the box and whisker plots of FIGS. 6 and 7, the fracture toughness ($K_{Ic}(E\&C)$) as measured in $MPa\ m^{1/2}$ was dependent upon the sintering temperature and the belt speed. As used herein, the designation " $K_{Ic}(E\&C)$ " means fracture toughness measured by the Evans and Charles method on a polished surface employing the Palmquist indentation technique using a 18.5 kg load on a Vickers indenter (see Evans and Charles, "Fracture Toughness Determination by Indentation", J. American Ceramic Society, Vol. 59, No. 7-8, pp. 371-372). The fracture toughness of the sintered compact sintered at 1720 °C was slightly lower than the toughness of the sintered compact which was sintered at 1760 °C or at 1800 °C. The toughness of

the sintered compact was highest for the lowest belt speed of 0.3 inches/minute.

5 In regard to the microstructure of the sintered compacts of Examples 1-6 of Composition A, the alpha'-SiAlON and beta'-SiAlON content was within an acceptable range. The alpha-silicon nitride content was present for the sintered compact sintered at 1720 °C for 60 minutes. Beta-phase of silicon nitride was not detected in any of the continuously-processed
10 sintered compacts of Composition A. The powder for Composition A was contaminated so that there were numerous pits in the sintered compacts.

Referring to FIGS. 8 and 9, visual
15 observation showed that there was little or no reaction layer for the sintered compacts sintered at 1800 °C for 60 minutes (FIG. 8), but there was an apparent reaction layer for the sintered compact sintered at 1760 °C for 120 minutes (FIG. 9). However, the depth of the reaction layer of FIG. 9 was thinner than the typical
20 surface reaction layer found in batch-processed sintered compacts.

SiAlON-based sintered compacts of a Composition B (Examples 7-12) were processed in a continuous fashion like the sintered compacts of
25 Composition A. The continuous processing occurred in the same belt style furnace used for processing sintered compact Examples Nos. 1-6.

Table IV and Table V below set forth the processing parameters and the physical properties for
30 the continuously-processed sintered compacts (Examples 7-12) of Composition B. The terms "T1", "T2", "T3", the belt speed, and the total time in the heating zone mean the same thing for Table IV as for Table II.

Table IV
Processing Parameters for the SiAlON-Based Sintered
Compacts (Examples 7-12) of Composition B

Ex.	T1	T2	T3	Belt Speed (inches/minute)	Total Time in the Hot Zones (minutes)
7	1720	1720	1720	0.6	60
8	1720	1720	1720	0.3	120
9	1760	1760	1760	0.6	60
10	1760	1760	1760	0.3	120
11	1800	1800	1800	0.6	60
12	1600	1760	1760	0.4	90

5

Table V below sets forth the physical properties of the as-sintered SiAlON-based sintered compacts of Composition B.

Table V
Physical Properties for the As-Sintered SiAlON-Based
Sintered Compacts (Examples 7-12) of Composition B

Example No.	Weight Loss (%)	Density (g/cc)	Vickers Hardness (GPa) [18.5 kg Load]	Fracture Toughness K_{Ic} (E&C) (MPa $m^{1/2}$)	Crystalline Phases Present
7	0.86	3.18	15.10	5.70	beta'-SiAlON
8	0.82	3.19	14.83	5.86	beta'-SiAlON
9	0.88	3.19	14.82	5.83	beta'-SiAlON
10	0.88	3.19	14.66	6.01	beta'-SiAlON
11	0.93	3.19	14.85	5.63	beta'-SiAlON
12	0.84	3.19	14.77	5.56	beta'-SiAlON

10

The weight loss, the density, the Vickers hardness, and the fracture toughness mean the same thing for Table V as for Table III.

5 In regard to the results set forth in Table IV and Table V, the weight loss appeared to be dependent on the temperature and the duration in that the weight loss increased with an increase in the temperature and an increase in the sintering duration. As in the case of the sintered compacts of Composition A, the weight loss seems to have been due to the volatilization of the constituent materials. The extent of weight loss is comparable to that for batch-processed sintered compacts of the same composition.

10 The density of the sintered compacts was greater than the target density of 3.16 grams per cubic centimeter. The Vickers hardness (18.5 Kg load) did not appear to be dependent upon the continuous sintering conditions. The fracture toughness [K_{IC} E&C] of the sintered compacts of Composition B was higher than the target range of 4.3 to 5.7 MPa $m^{1/2}$, but appeared to be dependent upon the belt speed of the continuous process (FIG.2). A slower belt speed yielded a higher fracture toughness in that the two highest fracture toughness values were of sintered compacts processed at the slowest belt speed of .3 inches per minute.

25 In regard to the microstructure, a beta'-SiAlON (z=3) phase was the only crystalline phase present in the examples, except for the sintered compact which was sintered at 1760 °C for 120 minutes wherein a minor amount of SiAlON phase was present in this sintered compact. The uniformity of the microstructure of the sintered compacts was excellent. Referring to FIGS. 3 and 4, the sintered surfaces were very clean wherein no reaction layer was observed on the surface of the sintered compacts of Examples 7-12.

30 Overall, sintered compact Examples 1-6 and sintered compact Examples 7-12 show that the sintered compacts processed according to the continuous process produced sintered compacts with acceptable physical

properties and a clean surface either without a reaction surface layer or with only a thin surface reaction layer. In the case where there was no surface reaction layer, there was no need to utilize a grinding step to achieve an acceptable surface appearance. In the case where there was a thin surface reaction layer, only a small amount of grinding was necessary to achieve an acceptable surface appearance. Furthermore, the continuous process did not require the delubed green cutting insert compacts to be physically transferred into a separate container for post-delubing continuous processing in the belt furnace.

In a comparison of the physical properties of a continuous-processed sintered compact of Composition B and a batch-processed sintered compact of Composition B, it was found that the continuously-processed sintered compact had improved toughness and hardness properties. The continuous processing parameters are set forth below: (1) green compacts were placed in boron nitride boats without setting powder; (2) the heating rate was 150 °C/minute from 500 °C to 1760 °C; (3) the compacts were held for 120 minutes at 1760 °C; (4) the atmosphere was one atmosphere of flowing nitrogen flowing through the preheating region, the hot zone, and the cooling region; and (5) the compacts were cooled in an unheated water-cooled cooling region. The batch processing parameters were: (1) placing the green compacts in graphite pots with a setting powder; (2) heating the compacts at 15 °C/minute to the sintering temperature of between 1800-1825 °C, and holding the compacts at the sintering temperature for 90 minutes under one atmosphere of nitrogen.

35 Table VI below sets forth the physical properties.

Table VI
Fracture Toughness (K_{Ic} (E&C)) and Vickers Hardness
[18.5 Kg Load] of a Sintered Compact of
Composition No. B
Continuously-Processed and Batch-Processed

Property	Example No. 13 [Batch Processed]	Example No. 14 [Continuously Processed]
Fracture Toughness (K_{Ic} (E&C))	5.15 MPa m ^{1/2}	5.43 MPa m ^{1/2}
Hardness (Vickers 18.5 kg load)	14.64 GPa	14.8 GPa

A review of the test results shows that for these sintered compacts of Composition B, the continuously-processed sintered compacts exhibited a fracture toughness and a hardness that were greater than those of the batch-processed sintered compacts. The K_{Ic} (E&C) fracture toughness is statistically significant at the ninety-five percent confidence level. This comparison shows that in addition to providing a sintered compact without a surface reaction layer, the continuously-processed sintered compacts had physical properties superior to those of the batch-processed sintered compacts.

In machining tests using Inconel 625 and Waspalloy as the workpiece material, the continuously-processed cutting inserts of Composition B had between about one and one-half and about three times the tool life as compared to the batch-processed cutting inserts of Composition B. The results of the testing on Waspalloy and Inconel 625 are set forth below.

In wet turning a jet engine housing comprised of AMS5707 Waspalloy, the operating parameters were a speed of 970 surface feet per minute (sfm) [295.6 surface meters per minute], a feed of 0.0035 inches [.089 mm] per revolution, and a depth of cut of between about .05 inches to about .08 inches

(1.27-2.03 mm) using a RCGV45T (.004 inches by 20 degree chamfer) style of cutting insert. From these tests it was found that where it normally took twenty batch-processed cutting inserts of Composition B to machine the part, it took only six to seven of the continuously-processed cutting inserts of Composition B to machine the part. This test shows that in this application, the continuously-processed cutting inserts had a tool life of about three times the tool life of the batch-processed cutting inserts.

In wet turning a AMS5666 Inconel 625 ring, the operating parameters were a speed of 770 surface feet per minute [234.7 surface meters per minute], a feed of between .005 and .009 inches [.127-2.29 mm] per revolution, and a depth of cut of between about .05 inches and .08 inches [1.27-2.03 mm] using a RNG-45 honed (.001-.002 inch hone) style of cutting insert. The test results showed that the continuously-processed cutting inserts of Composition B had a tool life of between about 1.5 times to about 2 times the tool life of the batch-processed cutting inserts of Composition B.

In the wet turning of the AMS5707 Waspalloy material, as well as in the wet turning of the AMS5666 Inconel 625 material, the continuously-processed cutting inserts of Composition B had better chipping resistance than the batch-processed cutting inserts of Composition B.

Results for turning Inconel 718 are set forth below in Table VII. The test conditions for this turning test were: a RNG-45T style cutting insert; a speed of 600 surface feet per minute (sfm) [182.9 surface meters per minute]; a feed of .006 inches per revolution [.152 millimeters [mm] per revolution]; a depth of cut of .080 inches depth of cut [2.03 mm depth of cut]; and flood coolant with sol 20:1.

Table VII
Turning Test Results for Turning Inconel 718

Example	Rep. 1 Tool Life (minutes)	Rep. 2 Tool Life (minutes)	Rep. 3 Tool Life (minutes)	Rep. 4 Tool Life (minutes)	Average Tool Life (minutes)
Example 15 Composition A Continuously Processed	4.2	5.2	5.4	4.5	4.8
Example 16 Composition A Batch- Processed	4.7	5.4	4.9	3.6	4.7

Table VII shows the results for four replications of each cutting insert. For all of the above tests set forth in Table VII, the failure mode was by maximum flank wear of .030 inches. In other words, the test was stopped and the tool life recorded in minutes when the flank wear reached .030 inches. A review of the test results set forth in Table VII shows that the tool life of the continuously-processed cutting insert of Composition A was essentially equivalent to the tool life of the batch-processed cutting insert of Composition A.

The turning test results for turning Inconel 718 using continuously-processed cutting inserts of composition B as compared to batch-processed cutting inserts of composition B are set forth below in Table VIII. The test conditions for this turning test were: a RNG-45T style cutting insert; a speed of 600 surface feet per minute (sfm) [182.9 surface meters per minute]; a feed of .006 inches per revolution [.152 mm per revolution]; a depth of cut of .080 inches [2.03 mm depth of cut]; and flood coolant with sol 20:1.

Table VIII
Turning Test Results for Turning Inconel 718 Using
Cutting insert Examples 17 and 18

Example	Rep. 1 Tool Life (minutes)	Rep. 2 Tool Life (minutes)	Rep. 3 Tool Life (minutes)	Rep. 4 Tool Life (minutes)	Average Tool Life (Minutes)
Example 17 Comp. B/ Continuously Processed	6.0	7.4	6.7	8.0	7.0
Example 18 Comp. B/ Batch- Processed	8.5	7.6	6.7	7.7	7.6

Table VIII shows four replications for each cutting insert. For all of the examples the failure mode was maximum flank wear of .030 inches. Like for the tests set forth in Table VI, the failure mode was by maximum flank wear of .030 inches which meant that the test was stopped and the tool life recorded in minutes when the flank wear reached .030 inches. In regard to the test results set forth in Table VII, except for Rep. 1, the continuously-processed cutting inserts of Composition B had performance comparable to the batch-processed cutting inserts (Composition B).

A comparison of the microstructure of the continuously-processed cutting insert and the batch-processed cutting insert of Composition B showed that the continuously-processed cutting insert had superior microstructural properties. These microstructural differences may account for the performance improvement observed with the continuously-processed cutting inserts of Composition B over the batch-processed cutting inserts of Composition B. A continuously-processed cutting insert of Composition B and a batch-processed cutting insert of Composition B were prepared for grain size measurements in the following fashion. After polishing, the inserts were etched in 450 °C molten KOH wherein the etch time was 35 seconds for each cutting insert. Grain measurements were completed

on the batch-processed cutting insert of Composition B. But the grain boundaries had not etched sufficiently on the continuously-processed cutting insert of Composition B and a grain size comparison could not be completed.

A difference in the multi grain glass pocket distribution appeared to exist between the continuously-processed and the batch-processed cutting inserts. FIGS. 11 and 12 presents the microstructures of the continuously-processed cutting insert and the batch-processed cutting insert, respectively. The jandel sigmascan pro V3 was used to compare the glass pocket sizes. The etched pockets had a grey level similar to the center of the SiAlON grains. So, measuring the glass pockets based on grey level distribution was difficult. Setting the grey level range so that dark regions of the grains were not included underestimated the pocket size. The final image analysis method was a single pass with the ranking filter. The rank was set at 9 dilating dark areas. Then three passes with the averaging convolution filter was completed. The divisor was set at 9. A binary image was made highlighting grey level range 0 to 60-67. This binary layer selected the center glass pocket region. A second binary layer highlighted the grey levels from 40 to 84. The upper limit could be lower and the lower limit higher depending on the SEM image contrast. This second layer overlapped the first layer and captured a greater amount of the pocket. But regions in the SiAlON grain centers were also highlighted in the second layer. The upper limit of the second layer was set so the glass pockets did not merge with regions extending from the grain center. The two layers were merged into a third binary layer. The objects in the third layer were measured and tabulated. The objects in the third layer were total areas. The objects in the second layer were

5 tabulated and measured. If the second layer object was a grain center that area was the same as the its area in the third layer. But the area of the glass pocket in the second layer is reduced by the grey level that was in the first layer and not the second. Since the second layer formed a region around the first, the second layer objects were measured in the same order as the third layer. The grain center objects were eliminated by subtracting the second object area from 10 the third. All values of 0 were grain centers. This resulted in a better estimation of the large glass pockets. But it did not sample the smaller pockets well. Some of these pockets would not be selected until the grey level reached the overlap region between 15 the first and second layer. Therefore the second layer area would be the same as the third and these objects would be eliminated. Additional steps could be introduced to capture this size range but were not because the coarse end is of interest.

20 The glass pockets were measured from four micrographs for each one of the cutting inserts (continuously-processed and batch-processed) of Composition B. The magnification was 2500X. Over two thousand glass pockets were measured from each one of 25 the cutting inserts. The two glass pocket distributions were compared by the Mann-Whitney U Test. The major axis length distributions were compared. The Mann-Whitney U Test results in Table VIII found the difference in the two distributions to be very 30 significant. The high Z value signifies a very high confidence that the distributions were different. The batch-processed cutting insert of Composition B had larger glass pockets than the continuously-processed cutting insert.

35 Based on the histogram, ninety percent of the glass pockets in the continuously-processed cutting insert had a major axis length of 1 micron or less.

While ninety percent of the glass pockets in the batch-processed cutting insert had a major axis length of 1.33 microns or less. The box and whisker plot depicts the difference in the distributions in FIG. 13.

The measurement method supports a difference in the glass distribution, but it under estimates the size of the glass pockets. The more uniform distribution of the glass pockets of the continuously-processed cutting insert could contribute to the improved resistance to chipping observed in the metal cutting field tests. The Mann-Whitley U Test results for these measurements are set forth in Table IX below.

Table IX
Mann-Whitley U Test Results for Measurement of Glass Pockets In Batch-Processed Cutting Inserts and Continuously-Processed Cutting Inserts

Rank Sum Batch-Processed Cutting Inserts	11829302
Rank Sum Continuously-Processed Cutting Inserts	12695225
U	4081879
Z	22.11
p-level	0
Z adjusted	22.11
p-level	0
Valid N For Batch-Processed Composition B	2853
Valid N For Continuously-Processed Composition B	4150

The test results below in Table X and Table XI compare the milling properties of continuously-processed cutting insert of Composition C against a batch-processed cutting insert of Composition C. Table X below sets forth the composition and processing parameters for cutting insert Examples 19-25.

Table X
Composition and Processing
Parameters for Cutting Insert Examples 19-24

Example	Composition	Process	Temperature [°C] (Continuous)	Time [minutes] (Continuous)
19	C	Continuous	1826	60
20	C	Continuous	1826	120
21	C	Continuous	1826	180
22	C	Continuous	1826	60
23	C	Continuous	1826	180
24	C	Batch	-	-

5 In Table X, the term "Composition" refers to the composition of the example, the "Process" refers to the type of process (either continuous or batch), the "Temperature" refers to the maximum sintering temperature (°C) for the continuously-processed cutting inserts, and the "Time" refers to the total time in
10 minutes the cutting inserts were at the sintering temperature.

The test conditions for this turning test were: a SPG-633T style cutting insert; the workpiece material was Class 40 Gray Cast Iron; a speed of
15 3000 surface feet per minute (sfm) [914.5 surface meters per minute]; a feed of .009 inches per revolution [.229 mm per revolution]; a depth of cut of .080 inches depth of cut [2.03 mm depth of cut]; the width of the cut was 3 inches [7.62 cm] by 24 inches
20 [61 cm]; and dry milling using no coolant.

Table XI
Test Results from Milling Class 40 Gray Cast Iron
(Solid Block)
Using Cutting Insert Examples 19-24

Ex.	Rep. 1/ Passes	Rep.1/ Tool Life	Rep.1 /EOL	Rep. 2/ Passes	Rep.2/ Tool Life	Rep.2 /EOL	Avg. Tool Life (Passes)	Avg. Tool Life (Min.)
19	130.6	46.7	fw	130.5	46.7	fw	130.5	45.7
20	82.3	28.8	fw	77.1	27.0	fw	79.7	27.9
21	81.3	28.6	fw	106.4	36.9	nw	93.4	32.7
22	94.9	33.2	fw	88.0	30.8	fw	91.5	32.0
23	109.4	38.3	fw	32.0	11.2	ch	70.7	24.7
24	109.6	38.4	fw	88.0	30.8	ch	98.8	34.6

5 The end of tool life (EOL) criteria were: .015 inches flank wear (fw); .030 inches maximum flank wear (mfw); .030 inches nose wear (nw); and .030 inches depth of cut notch (dn) or chip (cp). The tool life reflects the actual chip cutting time in minutes.

10 The test results below in Table XII and Table XIII compare the milling properties of continuously-processed cutting inserts of Composition C against batch-processed cutting inserts of Composition C. Table XII below sets forth the
15 composition and processing parameters for cutting insert Examples 25-28.

Table XII
Composition and Processing
Parameters for Cutting Insert Examples 25-28

Example	Composition	Process	Temperature [°C] (Continuous)	Time [minutes] (Continuous)
25	C	Continuous	1826	90
26	C	Continuous	1826	120
27	C	Continuous	1826	180
28	C	Batch	-	-

The test conditions for this turning test were: a SPG-633T style cutting insert; a speed of 3000 surface feet per minute (sfm) [914.5 surface meters per minute]; a feed of .006 inches per revolution [.152 mm per revolution]; a depth of cut of .080 inches depth of cut [2.03 mm depth of cut]; the width of the cut was 3 inches [7.62 cm] by 24 inches [61 cm]; and dry milling using no coolant.

Table XIII
Test Results from Milling Class 40 Gray Cast Iron
(Solid Block) Using Cutting Insert Examples 25-28

Ex.	Rep.1/ Passes	Rep.1 /Tool Life	Rep.1 /EOL	Rep.2/ Passes	Rep.2 /Tool Life	Rep.2 /EOL	Avg. Tool Life (Passes)	Avg. Tool Life (Min.)
25	69.2	36.0	fw	164.0	86.3	fw	116.6	80.6
26	43.2	22.6	fw	122.4	63.8	nw	82.8	43.1
27	44.1	22.9	fw	59.3	30.3	nw ch	51.2	26.6
28	45.2	23.5	fw	44.3	23.0	nw ch	44.8	23.3

The end of tool life (EOL) criteria were: .015 inches flank wear (fw); .030 inches maximum flank wear (mw); .030 inches nose wear (nw); and .030 inches depth of cut notch (dn) or chip (cp). The tool life reflects the actual chip cutting time in minutes.

Referring to the test results set out in Table XIII, it becomes apparent that the continuously processed cutting inserts of Composition C exhibited improved tool life. The cutting inserts that were held for 90 minutes at 1826 °C had an average tool life in minutes of 80.6 minutes and an average tool life in passes of 116.6 passes. The cutting inserts that were held for 120 minutes at 1826 °C had an average tool life in minutes of 43.1 minutes and an average tool life in passes of 82.2 passes. Both of these cutting inserts exhibited much better performance than the batch-processed cutting inserts, which had an average tool life in passes of 44.8 and an average tool life in

minutes of 23.3 minutes. The cutting insert of Composition C held in the heating zones for 180 minutes an average tool life in passes of 51.2 passes and an average tool life in minutes of 26.6 minutes. The performance of this cutting insert (Example 27) was somewhat better than that of the batch-processed cutting insert (Example 28). Overall it seems that while all of the continuously-processed cutting inserts of Composition C had better performance than the batch-processed cutting insert, the continuously-processed cutting inserts held in the heating zones for 60 minutes and 120 minutes (Examples 25 and 26, respectively) had much better performance characteristics.

The test results set forth in Table XIV and Table XV below reflect the results from turning tests of continuously-processed cutting inserts of Composition C as compared to batch-processed cutting inserts of Composition C. Table XIV below sets forth the composition and processing parameters for cutting insert Examples 29-32.

Table XIV
Composition and Processing
Parameters for Cutting Insert Examples 29-32

Example	Composition	Process	Temperature [°C] (Continuous)	Time [minutes] (Continuous)
29	C	Continuous	1826	60
30	C	Continuous	1826	120
31	C	Continuous	1826	180
32	C	Batch	-	-

The test conditions for this turning test were: a SPG-633T style cutting insert with a lead angle of 16 degrees; a workpiece material of Class 40 Gray Cast Iron; a speed of 2000 surface feet per minute (sfm) [610 surface meters per minute]; a feed of

.016 inches per revolution [.406 mm per revolution]; a depth of cut of .100 inches depth of cut [2.54 mm depth of cut]; and dry turning using no coolant.

5 Table XV
Results of Turning Tests of Class 40 Gray Cast Iron
Using Cutting Insert Examples 29-32

Ex.	Rep. 1/TL	Rep.1 /EOC	Rep 2/TL	Rep.2 /EOC	Rep. 3/TL	Rep. 3/EOC	Rep. 4/TL	Rep. 4/EOC	Avg. Tool Life
29	17.0	nw mw	16.0	fw	13.0	fw	9.0	fw	13.6
30	10.7	fw	11.5	fw	14.6	fw	10.7	fw	11.9
31	17.2	mw	16.1	fw	14.3	fw ch	10.6	fw	14.6
32	12.8	fw	12.6	fw	12.7	fw	9.3	fw	11.8

10 The end of tool life (EOL) criteria were: .015 inches flank wear (fw); .030 inches maximum flank wear (mw); .030 inches nose wear (nw); and .030 inches depth of cut notch (dn) or chip (cp). The tool life reflects the actual chip cutting time in minutes.

15 In regard to the test results set forth in Tables XIV and XV, the continuously-processed cutting inserts of Composition C displayed better performance in turning Class 40 Gray cast iron than the batch-processed cutting insert. The continuously-processed cutting insert held at 1826 °C for 180 minutes (Example 31) exhibited the longest average tool life of 14.6 minutes as compared to the batch-processed cutting insert (Example 32) which had an average tool life-of 11.8 minutes. The continuously-processed cutting inserts held at 1826 °C for 60 minutes (Example 29) and 120 minutes (Example 30) had average tool lives of 13.6 minutes and 11.9 minutes, respectively.

25 Applicant contemplates that the cutting inserts as described above may be coated with a refractory coating for improved wear resistance. Conventional coating techniques may be used to coat these cutting inserts such as chemical vapor deposition

and physical vapor deposition. Exemplary coating materials include alumina, titanium carbonitride and titanium nitride.

5 Ceramic compacts of Composition A were continuously processed in a furnace along the lines of the furnace described in U.S. Patent No. 5,648,042, except that the furnace had four heating zones. Each heating zone was twelve inches long and was held at a temperature of 1800 °C. The belt speed was .4 inches
10 per minute so that the total time the green compacts spent in the heating zones was 120 minutes. The green ceramic compacts were placed in trays wherein some of the green compacts had boron nitride setting powder thereon to keep the parts from sticking together. Some
15 of the green compacts did not use any setting powder.

As mentioned above, batch-processed ceramic parts of Composition A typically form a surface reaction layer. This surface reaction layer generally is comprised of α' -SiAlON and β' -SiAlON and B phase
20 (Y_2SiAlO_5N). The presence of the B phase in the surface reaction layer reduces toughness and would result in a decrease in tool performance if not removed.

Continuously-processed ceramic parts did not have this B phase (Y_2SiAlO_5N) in the surface reaction
25 layer, but instead, exhibited a surface zone of α' -SiAlON and β' -SiAlON which had a higher content of α' -SiAlON than the bulk substrate. This surface zone extended inwardly from the surface of the substrate a distance of about .005 inches (.127 mm).

30 The X-ray diffraction patterns (FIGS. 15 through 17) show the presence of the higher α' -SiAlON in the surface region. More specifically, for an exposed surface of a cutting insert of Composition A held at 1800 °C for 120 minutes, FIG. 16 shows the
35 α' -SiAlON content to be 83.8 weight percent and the β' -SiAlON content to be 16.2 weight percent. This exposed surface was the top surface in the sinter box,

and thus, experienced the greatest exposure to the sintering atmosphere and the greatest potential for volatilization during sintering. Even though this exposed surface was subjected to the greatest potential for compositional change during sintering, it still reflected a high α' -SiAlON content in the surface region.

For one surface of the cutting insert of Composition A held at 1800 °C for 120 minutes stacked on another cutting insert, i.e., the stacked (or partially exposed) surface, FIG. 15 shows a higher α' -SiAlON content than that of the exposed surface. The higher α' -SiAlON content is due to the fact that the stacked surface was protected to some extent from (or was partially exposed to) the sintering atmosphere (or furnace environment) while the exposed surface was in direct exposure to (or contact with) the sintering atmosphere. It is important to appreciate that even though the local sintering environments for the exposed surface and the stacked surface were different, both surfaces had a high α' -SiAlON content in the surface regions thereof.

For the bulk of the cutting insert of Composition A held at 1800 °C for 120 minutes, FIG. 17 shows the α' -SiAlON content to be 18.3 weight percent and the β' -SiAlON content to be 81.7 weight percent. In order to obtain this data, a cutting insert was crushed prior to running the X-ray diffraction procedure.

In measuring the content of the surface region for a number of cutting inserts, it was found that in the surface region the α' -SiAlON content ranged between 57 weight percent to 92 weight percent with minor amounts of YAM and the balance β' -SiAlON. The bulk composition of the ceramic was 20 weight α' -SiAlON and 80 weight percent β' -SiAlON. Although no tests were conducted, it would be expected that the

metalcutting properties of such a ceramic would be good since the α' -SiAlON phase is about thirty percent harder than the β' -SiAlON phase.

5 It is apparent that applicant has developed a process, i.e., the continuous process, for the manufacture of ceramics (e.g. cutting inserts) [or sintered compacts], including without limitation SiAlON-based cutting inserts and silicon nitride-based cutting inserts, which have a number of improved
10 properties. These properties pertain to the appearance of the ceramic and the performance of the ceramic cutting insert.

The use of the continuous process essentially eliminates the presence of a surface reaction layer on
15 the surface of the sintered compact. The absence of the surface reaction layer eliminates a grinding step from the overall processing of the ceramic. This, of course, saves time and money in the manufacture of the ceramic. Even if there is some surface reaction layer,
20 in the continuous process the depth of the surface reaction layer is much less than in the batch-processed sintered compacts. A thinner surface reaction layer requires less grinding than for the batch-processed sintered compact, and hence, also saves time and money
25 in the manufacturing process. The use of the continuous process provides for a sintered compact which does not require any, or as much, grinding to achieve an acceptable surface appearance so that such a continuous process saves time and money over the batch-
30 processing of the ceramic parts.

The use of a continuous process also allows the green compacts to remain in the same container for both the delubing process and the continuous sintering process. By the green compacts remaining in the same
35 container, there is a cost savings associated with eliminating the need to transfer the delubed-green compacts into a container for processing.

Testing of continuous-processed cutting inserts against batch-processed cutting inserts show that the continuously-processed cutting inserts exhibit comparable or in some cases improved physical properties to the batch-processed cutting inserts. Testing also shows that the continuously-processed cutting inserts show improved performance properties in some applications as compared to batch-processed cutting inserts.

Overall, applicant has provided a process which provides for cost and labor savings thereby making the manufacturing process for efficient and profitable. Applicant has also provided a process, i.e., the continuous process, which produces a ceramic part (e.g., cutting insert and sintered compact) with improved or comparable physical properties, as well as improved or comparable performance properties, with respect to batch-processed ceramic parts (e.g., cutting inserts and sintered compacts).

The continuous process would appear to have application to the manufacture of ceramics (and sintered compacts) wherein the ceramic materials include, in addition to SiAlON-based materials and silicon nitride-based materials, alumina, alumina-based ceramics (e.g., alumina+titanium carbide, alumina+zirconia, alumina+zirconia+silicon carbide whisker, and alumina+silicon carbide whiskers), zirconia, zirconia-based ceramics, titanium carbide-based ceramics, titanium nitride-based ceramics, titanium carbonitride-based ceramics, (e.g., titanium carbonitride+silicon carbide whiskers +alumina), titanium boride-based ceramics, hafnium boride-based ceramics, zirconium boride-based ceramics and the like. The silicon nitride-based materials may include a ceramic with a starting powder composition of silicon nitride (e.g., 98.0 weight percent), small amounts (e.g., 1.0 weight percent) of magnesia, small amounts

(e.g., 1.0 weight percent) of yttria, and their equivalents as described in U.S. Patent No. 5,525,134.

The patents and other documents identified herein are hereby incorporated by reference herein.

5 Other embodiments of the invention will be apparent to those skilled in the art from a consideration of the specification or practice of the invention disclosed herein. It is intended that the specification and examples be considered as
10 illustrative only, with the true scope and spirit of the invention being indicated by the following claims.

WHAT IS CLAIMED IS:

1. A continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of:

5 forming a green compact from a powder mixture comprising a first component comprising compounds which contain elements of silicon, aluminum, oxygen and nitrogen; and the powder mixture further comprising a second component comprising a compound of
10 at least one element selected from the group consisting of yttrium, scandium, cerium, lanthanum and the metals of the lanthanide series, and the second component comprising between 0.1 and 10 weight percent of the powder mixture;

15 heat treating the green compact wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to produce a sintered compact.

2. The process according to claim 1 wherein
20 the ceramic material comprising a two-phase composite of alpha'-SiAlON phase and beta'-SiAlON phase, and a glassy phase; and

 wherein the alpha'-SiAlON phase ranges from 10 to 70 weight percent of the ceramic material,
25 the beta'-SiAlON phase ranges from 20 to 90 weight percent of the ceramic material, and the glassy phase ranges from 0.1 to 10 weight percent of the ceramic material.

3. The process according to claim 2 wherein
30 the glassy phase may also contain a crystalline phase from the group consisting of YAG, YAM, N-YAM, and Y-N- α -Wollastonite.

4. The process according to claim 2 wherein the ceramic material has the following physical

properties: a fracture toughness between about 5.93 and about 6.69 MPa m^{1/2}, a hardness of between about 15.68 and about 16.30 GPa, and a density of between about 3.24 and about 3.26 grams per cubic centimeter.

5 5. The process according to claim 2 wherein the beta'-SiAlON phase has the formula Si_{6-z}Al₂O₂N_{8-z} wherein z ranges between 0.38 and 1.5.

6. The process according to claim 5 wherein z is equal to about 0.8.

10 7. The process according to claim 1 wherein the heating zone is at a temperature between about 1600 °C and about 1800 °C and the green compact is in the heating zone for a time between about sixty minutes and one hundred twenty minutes.

15 8. The process according to claim 1 wherein the forming step comprises: milling the powder components; agglomerating the powder components with lubricant; and compacting the lubricant-agglomerated powder mixture into a green compact.

20 9. The process according to claim 8 wherein prior to the heat treating step, there is the step of delubing the green compact.

25 10. The process according to claim 9 wherein the green compact moves continuously from the delubing step to the heat treating step.

30 11. The process according to claim 1 wherein prior to the heat treating step, the green compact is placed in a container without any setting powder; and the container carrying the green compact is placed on a belt which passes the container and green compact through the one heating zone.

12. The process according to claim 11 wherein the belt moves at a linear speed so as to control the duration of the green compact in the one heating zone.

5 13. The process according to claim 1 wherein the heat treatment further comprises subjecting the green compact to one atmosphere of flowing nitrogen.

10 14. The process according to claim 1 wherein the ceramic material comprises SiAlON grains and an intergranular phase disposed between the SiAlON grains, wherein the SiAlON grains comprises at least 50 volume percent of the ceramic;

wherein the ceramic has less than 1 volume percent porosity;

15 wherein at least 70 volume percent of the SiAlON is beta'-SiAlON phase and the intergranular phase form 5 to 15 volume percent of the ceramic; and

wherein the beta'-SiAlON phase has a Z value of greater than 0.4 but less than 4.

20 15. The process according to claim 14 wherein the Z value of the beta'-SiAlON phase is about 3.

25 16. The process according to claim 14 wherein the ceramic has the following physical properties: a K_{IC} fracture toughness between 5.70 and 6.01 MPa $m^{1/2}$, a hardness of between 14.66 and 15.10 GPa, and a density of between 3.18 and 3.19 grams per cubic centimeter.

30 17. The process according to claim 14 wherein the intergranular phase of the ceramic sintered compact comprises glass pockets; and at least ninety percent of the glass pockets have a major dimension being less than or equal to one micron.

18. The process according to claim 14 wherein the intergranular phase of the ceramic comprises glass pockets; and the glass pockets having a uniform distribution.

5 19. The process according to claim 14 wherein the beta'-SiAlON phase comprises at least about 85 volume percent of the SiAlON.

10 20. The process according to claim 14 wherein the beta'-SiAlON phase comprises about 100 volume percent of the SiAlON.

15 21. The process according to claim 14 wherein the ceramic material includes one or refractory materials selected from the group consisting of titanium nitride, titanium carbonitride, titanium carbide, hafnium nitride, hafnium carbonitride, hafnium carbide, zirconium nitride, zirconium carbonitride, and zirconium carbide.

20 22. The process according to claim 1 wherein the sintered compact does not have a surface reaction layer.

23. The process according to claim 1 wherein the sintered compact has a surface reaction layer with a depth of no greater than .005 inches.

25 24. The process according to claim 1 further including the step of treating the sintered compact to form a cutting insert.

30 25. The process according to claim 24 further including the step of coating at least a portion of the cutting insert with a refractory coating.

26. The process according to claim 25 wherein the refractory coating is selected from the group consisting of alumina, titanium nitride and titanium carbonitride.

5 27. The process according to claim 14 wherein z is equal to about 0.4.

28. A continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of:

10 forming a green compact from a powder mixture of silicon nitride and one or more sintering aids;

15 subjecting the green compact to a heat treatment wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to form the sintered compact and wherein the heating zone is at a temperature greater than 1750 °C; and

20 the ceramic comprising a beta-silicon nitride phase and an intergranular phase.

29. The process according to claim 28 wherein the green compact is in the heating zone for a time between about sixty minutes and one hundred twenty minutes.

25 30. The process according to claim 28 wherein the sintering aids comprise magnesia and yttria, and the ceramic has at least 0.2 weight percent yttria and at least 0.2 weight percent magnesia wherein the sum of the yttria and the magnesia is less than
30 5 weight percent, and wherein the ceramic has 1.3 weight percent to 2.2 weight percent oxygen.

31. The process according to claim 30 wherein the ceramic has a density of at least 3.19 grams per cubic centimeter.

5 32. The process according to claim 30 wherein the ceramic has less than about 0.2 volume percent porosity.

10 33. The process according to claim 28 wherein the ceramic includes between about 1 to about 35 volume percent of one or more refractory materials selected from the group consisting of the nitrides, carbonitrides, and carbides of titanium, hafnium and zirconium, and tungsten carbide, and mixtures thereof.

15 34. The process according to claim 28 further including the step of coating at least a portion of the sintered compact with a refractory material.

20 35. The process according to claim 34 wherein the refractory coating is selected from the group consisting of alumina, titanium nitride, and titanium carbonitride.

25 36. A ceramic cutting insert comprising:
a cutting insert body having an as-molded rake face and an as-molded flank face, and the rake face intersecting with the flank face to form a cutting edge at the intersection; and
the cutting body having at least one of the as-molded rake face and the as-molded flank face does not have a surface reaction layer.

30 37. The ceramic cutting insert according to claim 36 wherein at least one of the as-molded rake face and as-molded flank face has a surface reaction layer to a depth of no greater than .005 inches.

38. The ceramic cutting insert according to claim 36 wherein the ceramic material comprising a two-phase composite of alpha'-SiAlON phase and beta'-SiAlON phase, and a glassy phase; and wherein the alpha'-
5 SiAlON phase ranges from 10 to 70 weight percent of the ceramic material, the beta'-SiAlON phase ranges from 20 to 90 weight percent of the ceramic material, and the glassy phase ranges from 0.1 to 10 weight percent of the ceramic material.

10 39. The ceramic cutting insert according to claim 36 wherein the ceramic material comprises SiAlON grains and an intergranular phase disposed between the SiAlON grains, wherein the SiAlON grains comprises at least 50 volume percent of the ceramic; wherein the
15 ceramic has less than 1 volume percent porosity;

wherein at least 70 volume percent of the SiAlON is beta'-SiAlON phase and the intergranular phase form 5 to 15 volume percent of the ceramic; and wherein the beta'-SiAlON phase has a Z value of greater
20 than 0.4 but less than 4.

40. A ceramic cutting insert comprising:
a cutting insert body, and the cutting
insert body having a microstructure including pockets
of a glassy phase; and wherein at least ninety percent
25 of the pockets of the glassy phase have a major axis which is of a dimension of one micron or less.

41. The ceramic cutting insert according to claim 40 wherein the ceramic material comprising a two-phase composite of alpha'-SiAlON phase and beta'-SiAlON
30 phase, and a glassy phase; and wherein the alpha'-SiAlON phase ranges from 10 to 70 weight percent of the ceramic material, the beta'-SiAlON phase ranges from 20 to 90 weight percent of the ceramic material, and the glassy phase ranges from 0.1 to 10 weight percent of
35 the ceramic material.

42. The ceramic cutting insert according to claim 40 wherein the ceramic material comprises SiAlON grains and an intergranular phase disposed between the SiAlON grains, wherein the SiAlON grains comprises at least 50 volume percent of the ceramic; wherein the ceramic has less than 1 volume percent porosity;

wherein at least 70 volume percent of the SiAlON is beta'-SiAlON phase and the intergranular phase form 5 to 15 volume percent of the ceramic; and wherein the beta'-SiAlON phase has a Z value of greater than 0.4 but less than 4.

43. The ceramic cutting insert according to claim 40 wherein the cutting insert body has a coating of a refractory material thereon, and the refracting material being selected from the group consisting of alumina, titanium nitride, and titanium carbonitride.

44. A sintered ceramic body comprising a substrate comprising a two-phase composite of alpha'-SiAlON and beta'SiAlON, and a glassy phase;

the substrate presenting a surface, the substrate having a surface region extending inwardly from the surface, and the substrate having a bulk region beneath the surface region; and

the surface region having a higher alpha'-SiAlON content than the bulk region.

45. The sintered ceramic body according to claim 44 wherein the content of alpha'-SiAlON in the surface region is between about two hundred percent to about five hundred percent greater than the alpha'-SiAlON content in the bulk region.

46. The sintered ceramic body according to claim 44 wherein the alpha'-SiAlON content in the surface region ranges between about 57 weight percent

and about 92 weight percent, and the alpha'-SiAlON content in the bulk region comprises about 20 weight percent.

5 47. The sintered ceramic body according to claim 44 wherein the surface region includes beta'-SiAlON, and the beta'-SiAlON content in the surface region being less than the beta'-SiAlON content in the bulk region.

10 48. The sintered ceramic body according to claim 44 wherein the surface region includes the glassy phase.

15 49. The sintered ceramic body according to claim 44 wherein the substrate has a coating of refractory material thereon, and the refractory material being selected from the group consisting of alumina, titanium nitride, and titanium carbonitride.

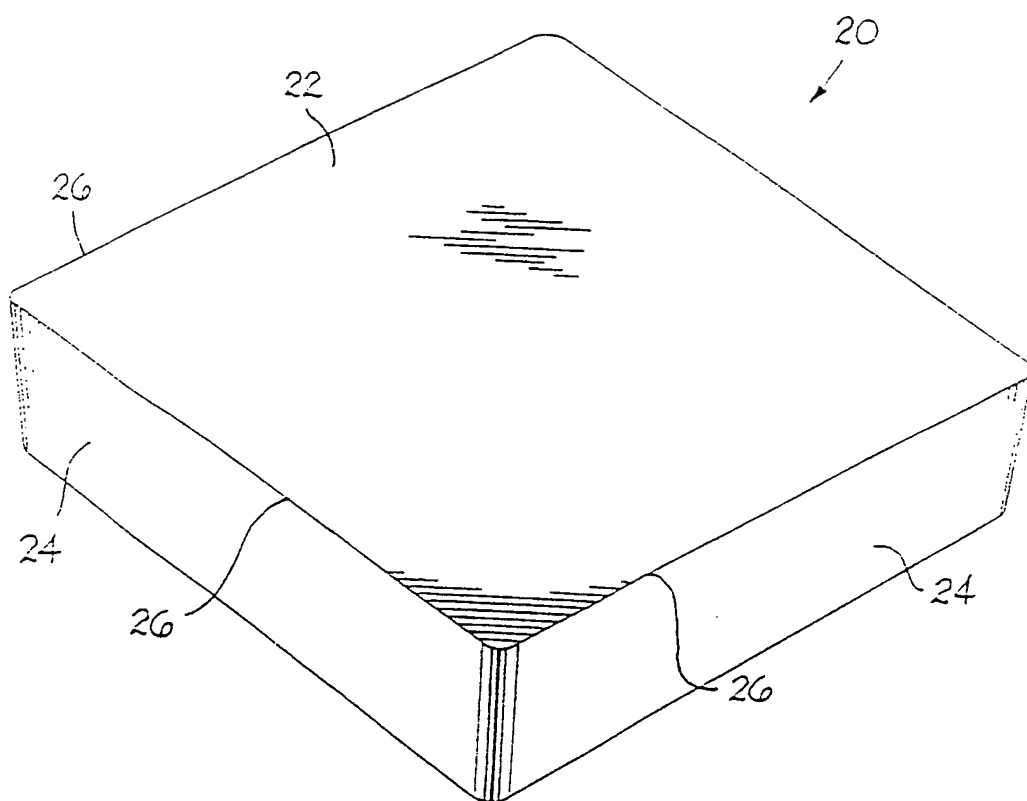


FIG. 1

2/13

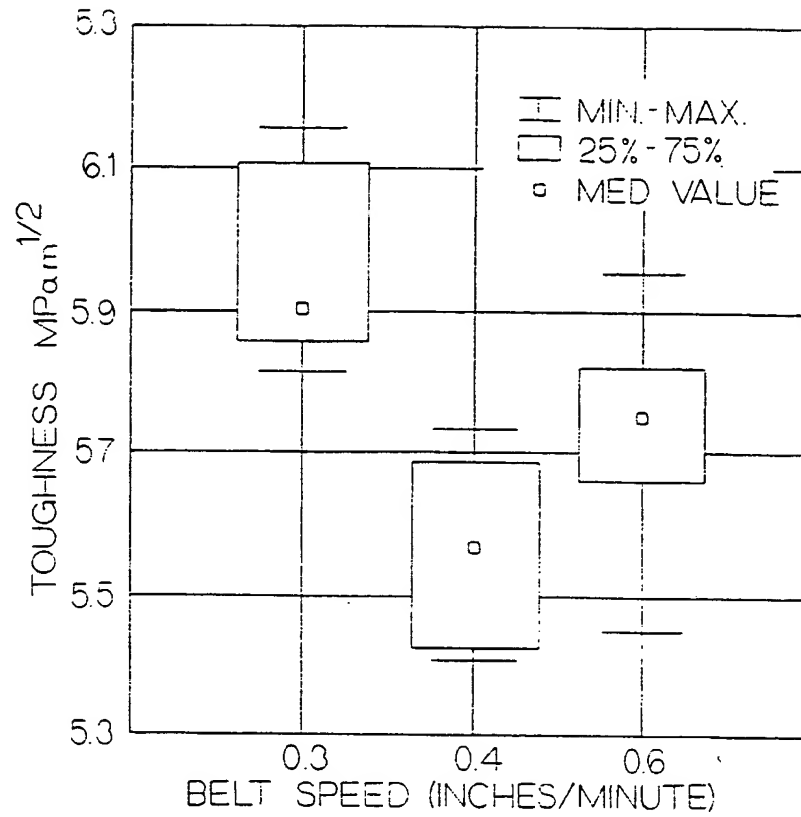


FIG. 2

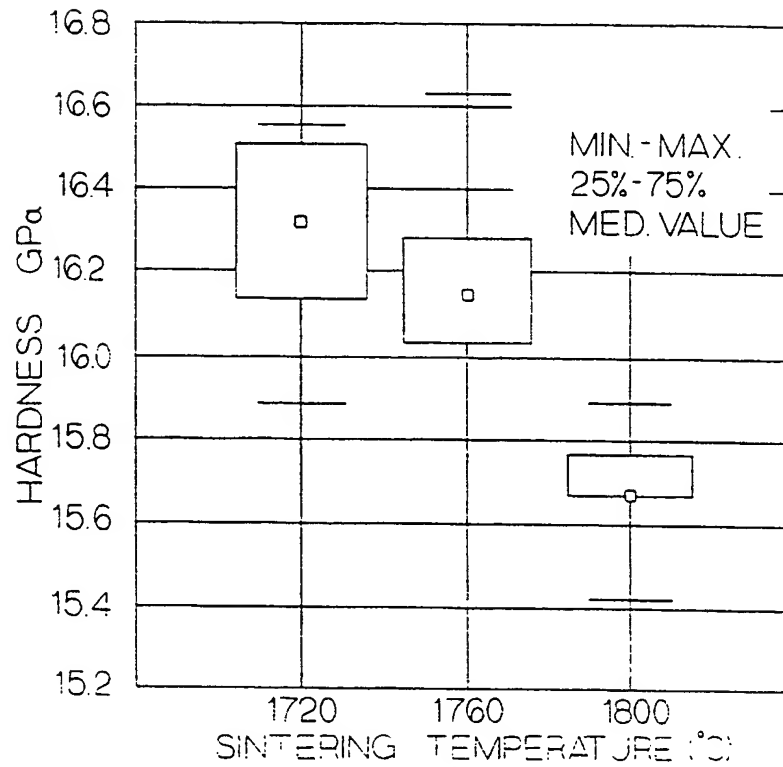


FIG. 5

3/13

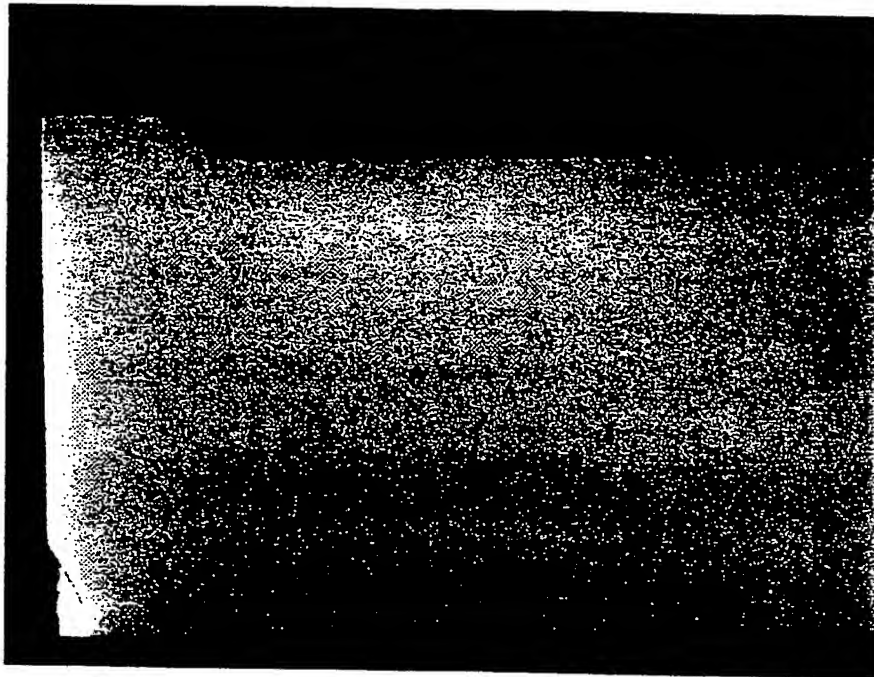


FIG. 3

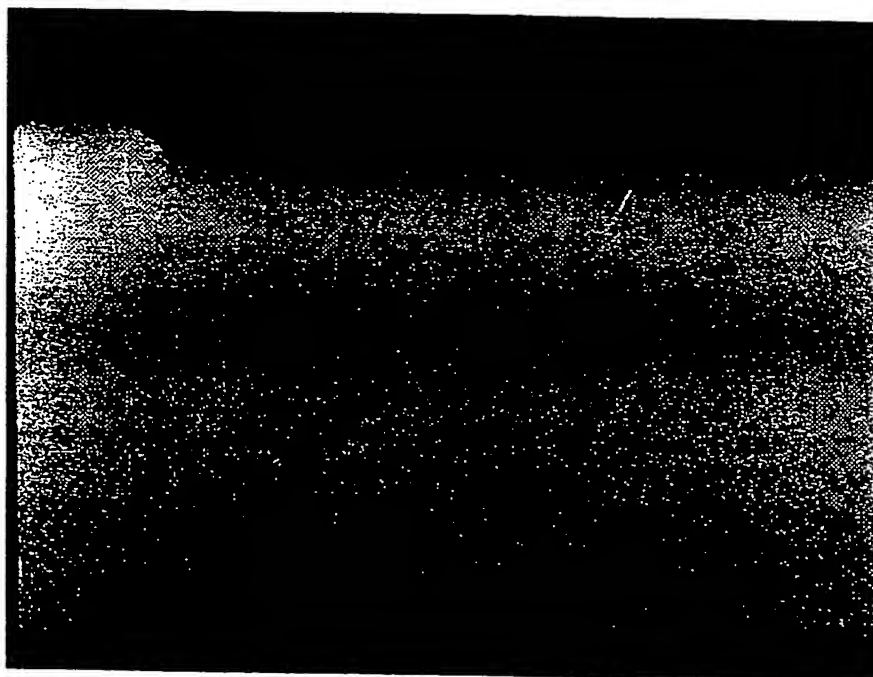


FIG. 4

4/13

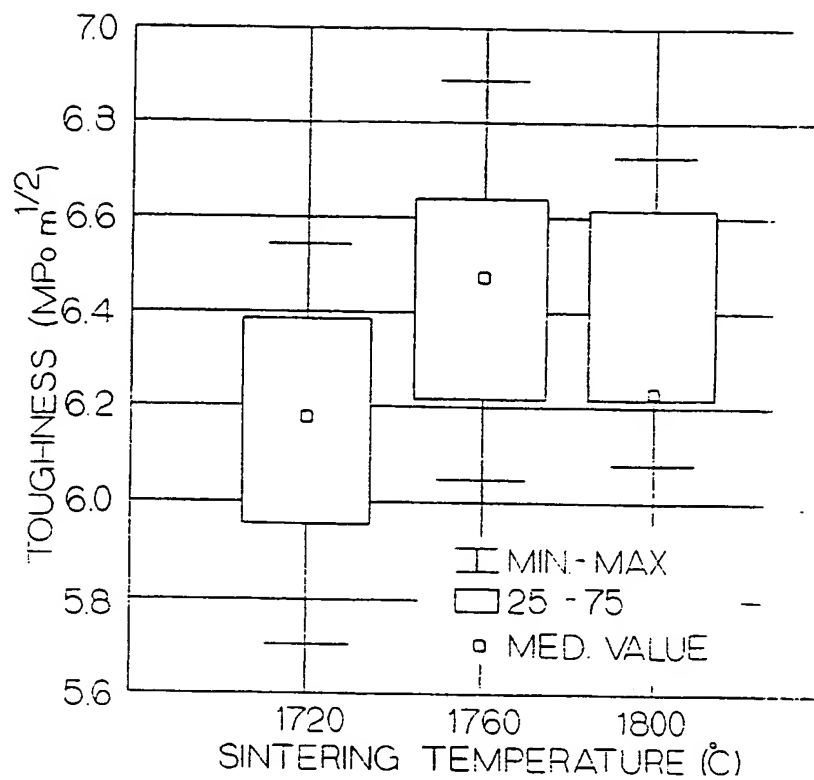


FIG. 6

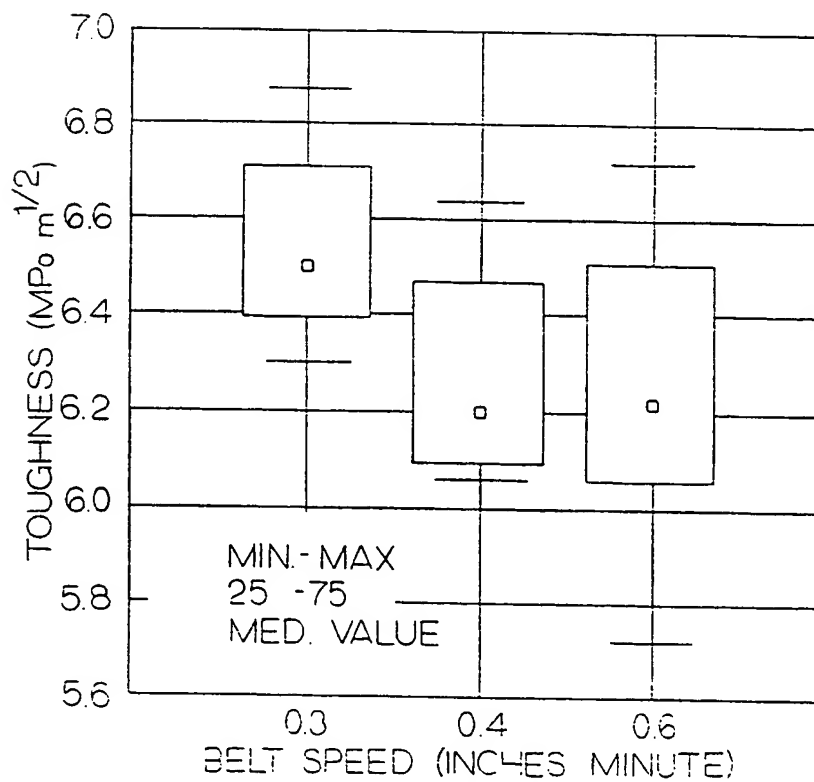


FIG. 7

5/13

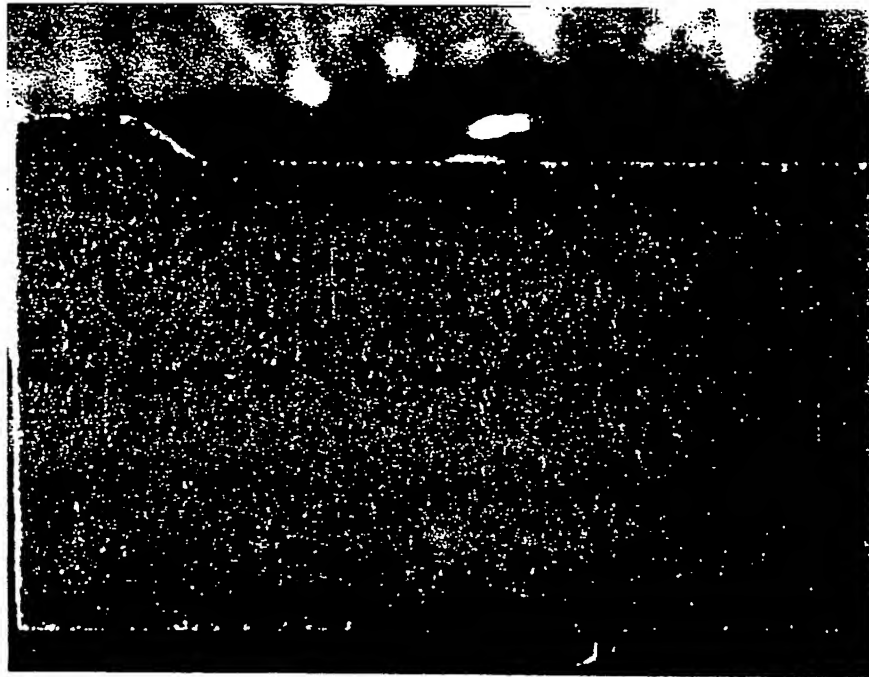


FIG. 8

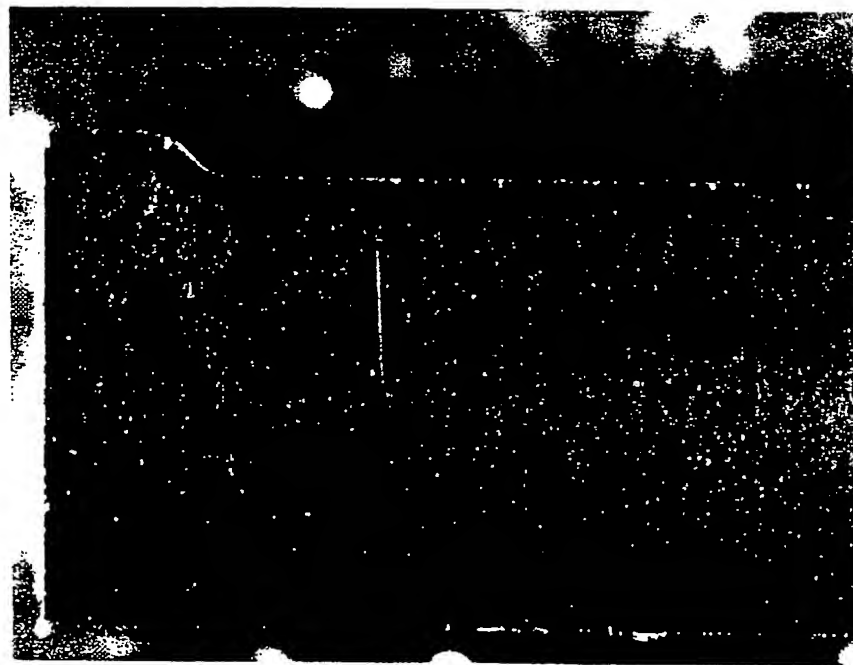


FIG. 9

6/13

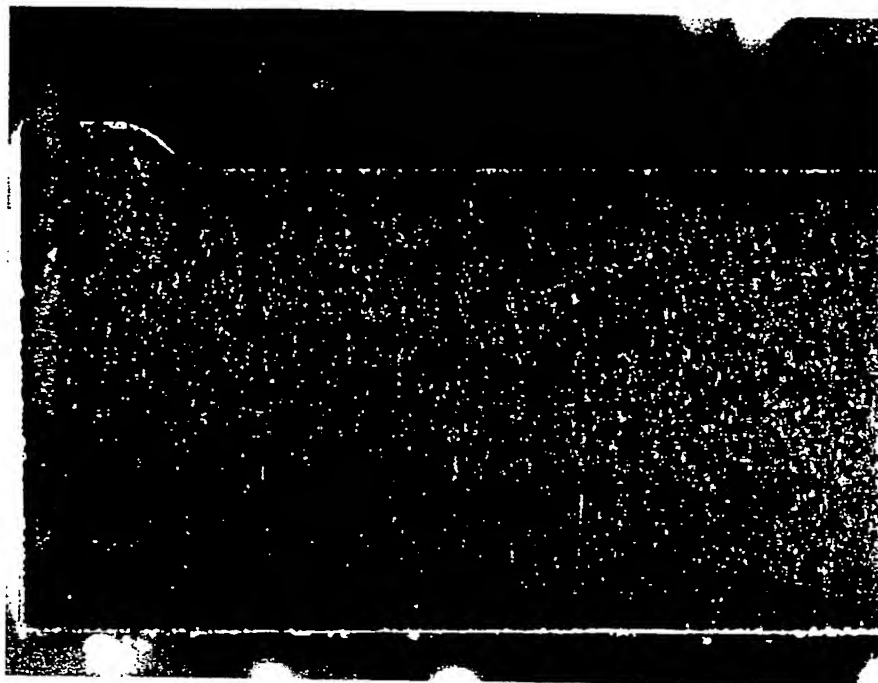


FIG. 10

7/13

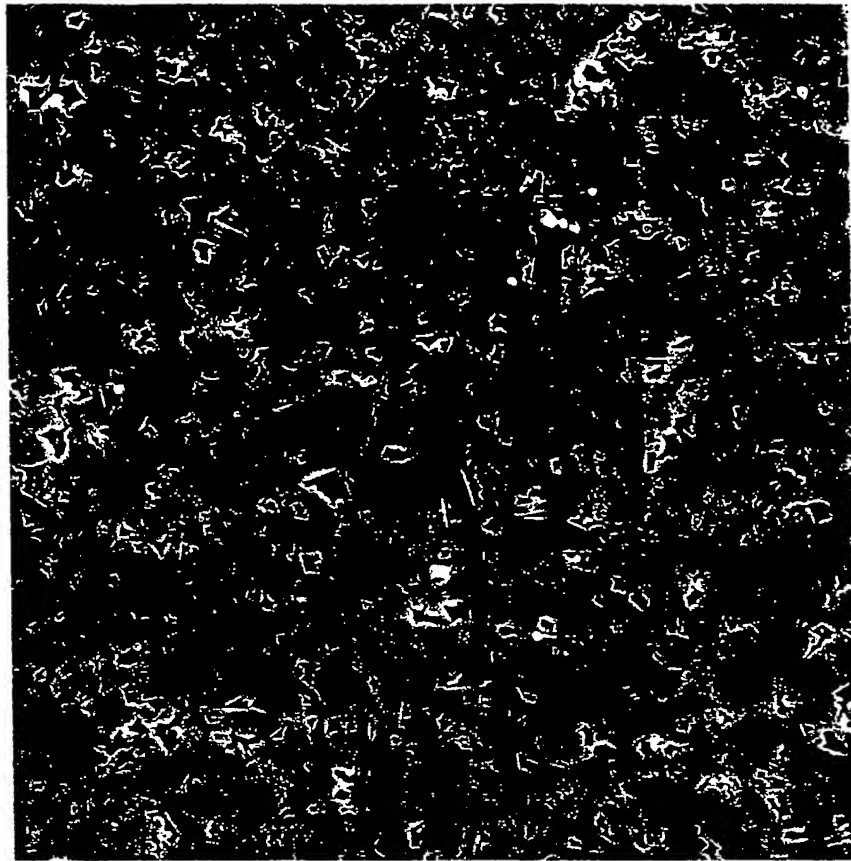


FIG. 11

8/13

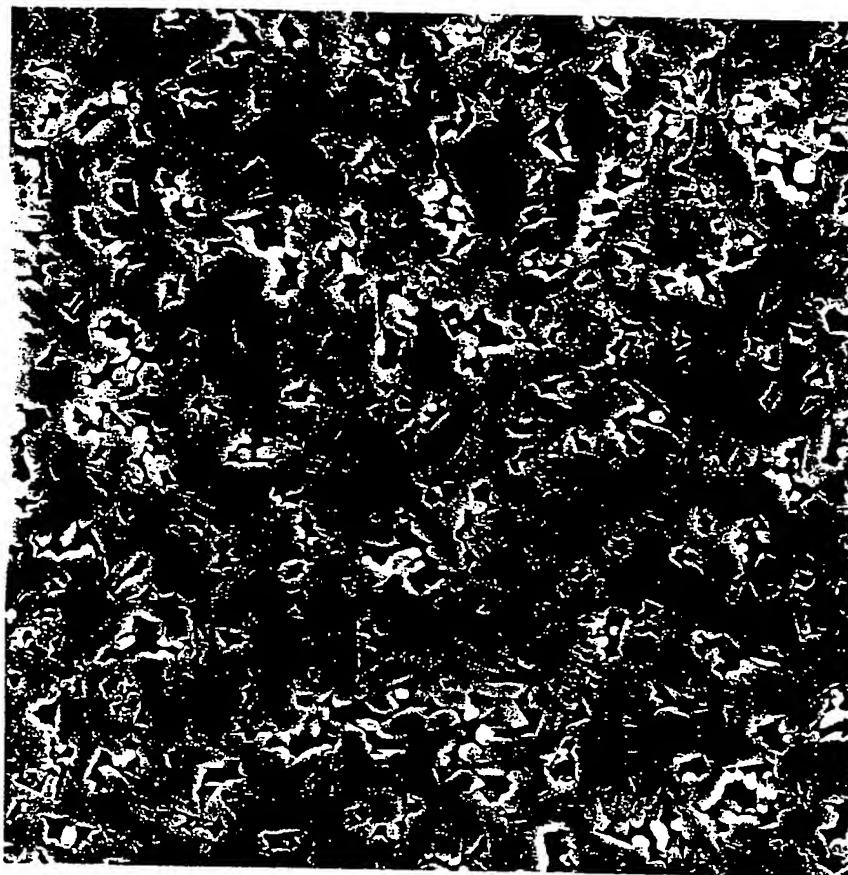


FIG. 12

9/13


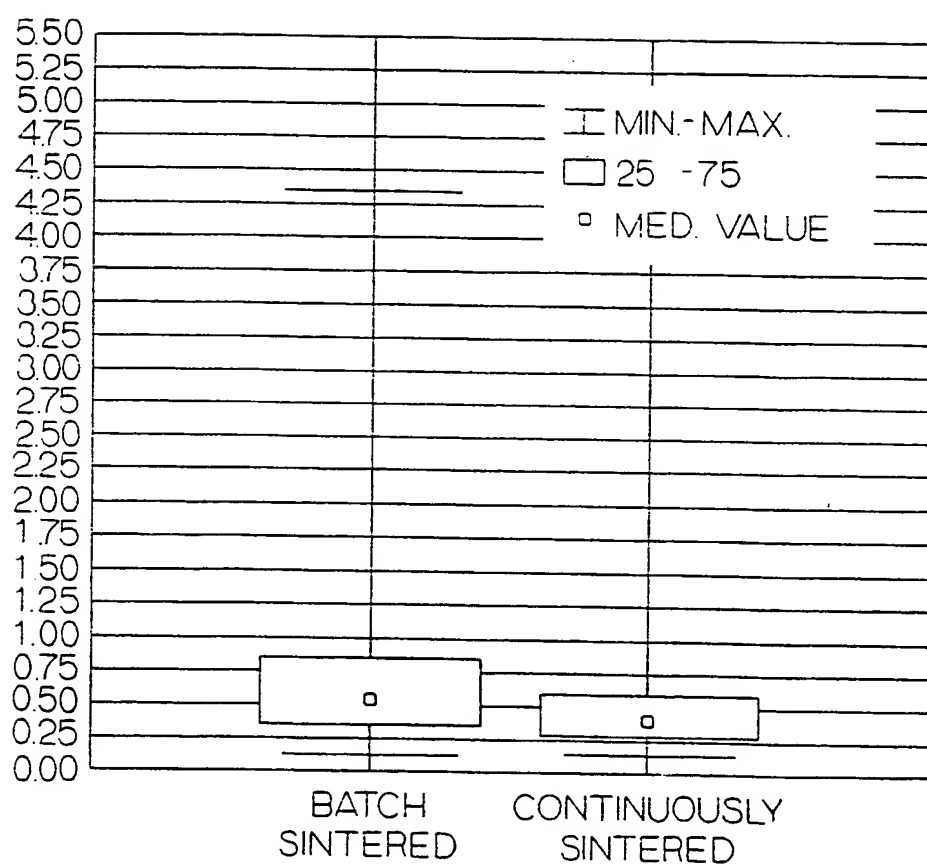


FIG.13

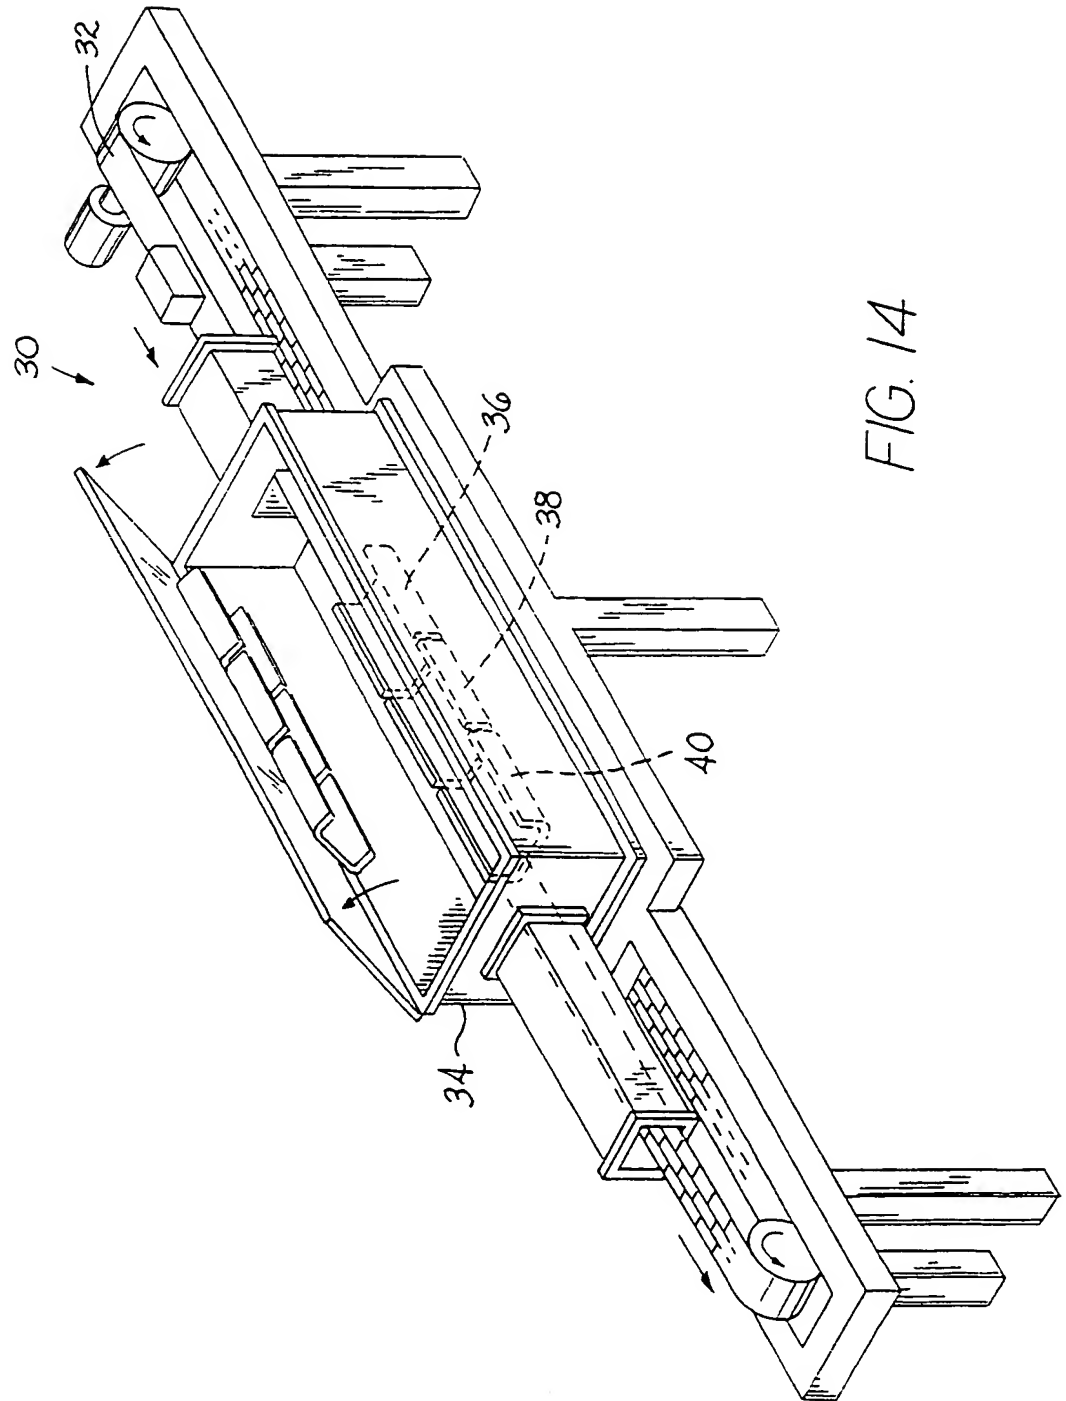

11/13

X-RAY DIFFRACTION PHASE ANALYSIS

ESTIMATE - ALPHA-SIALON 92.5%

ESTIMATE - BETA-SIALON 7.5 %

YAM-RELATIVE INTENSITY IS 4.0

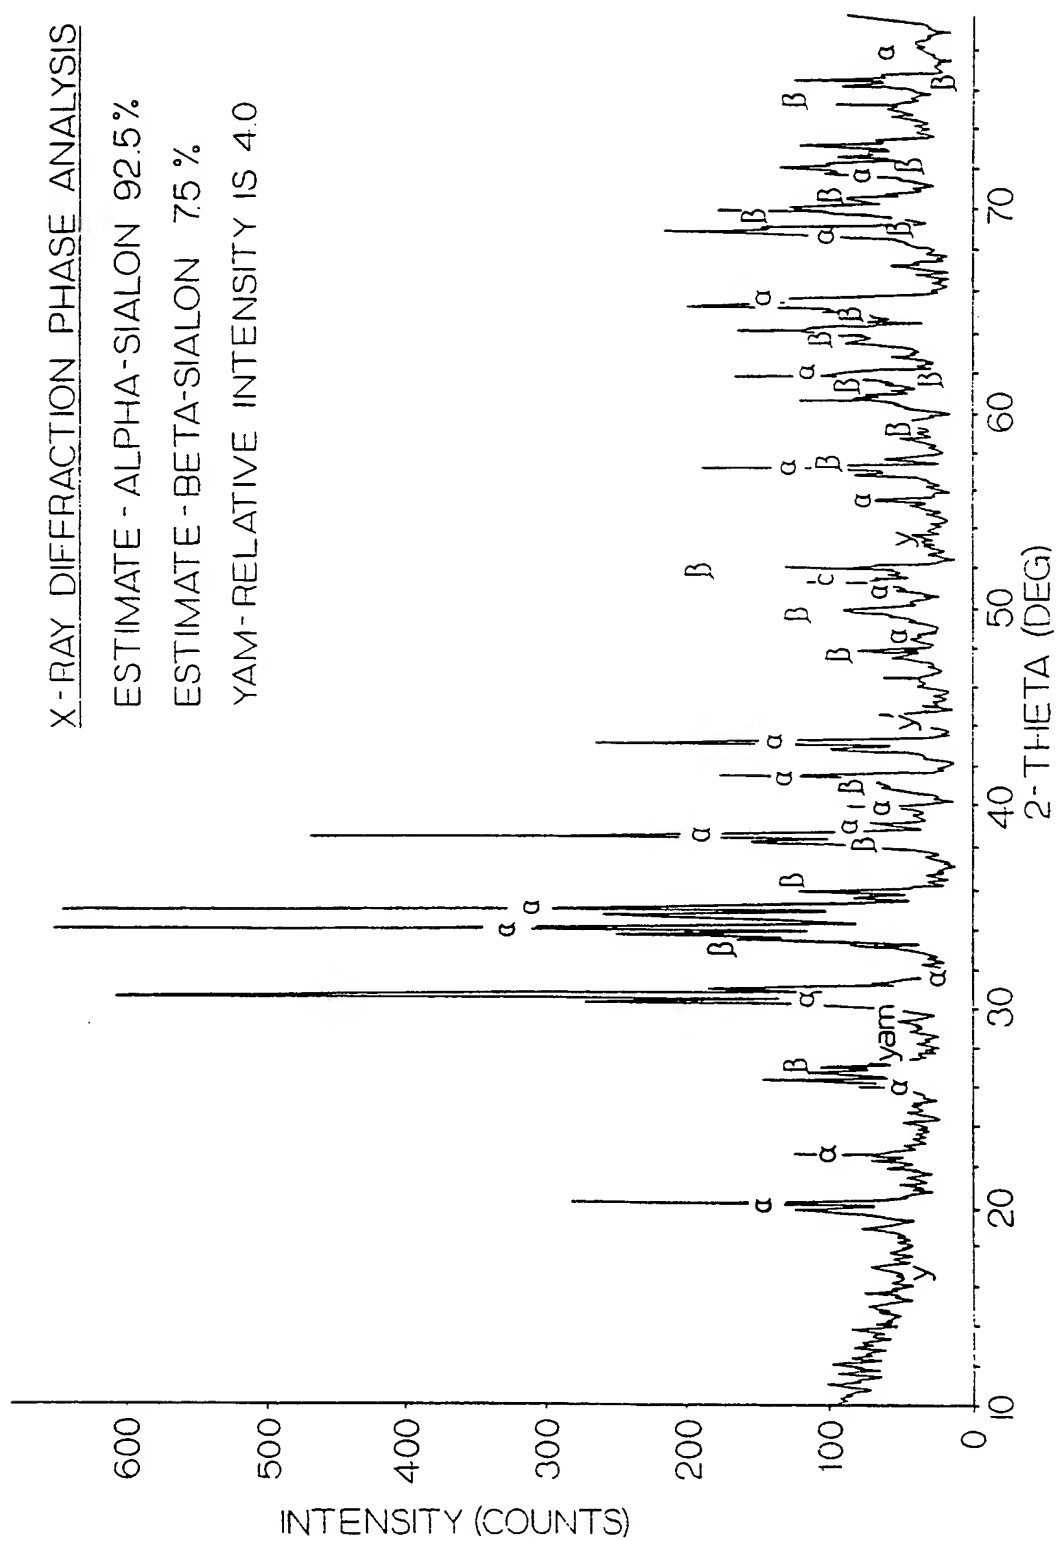


FIG. 15

12/13

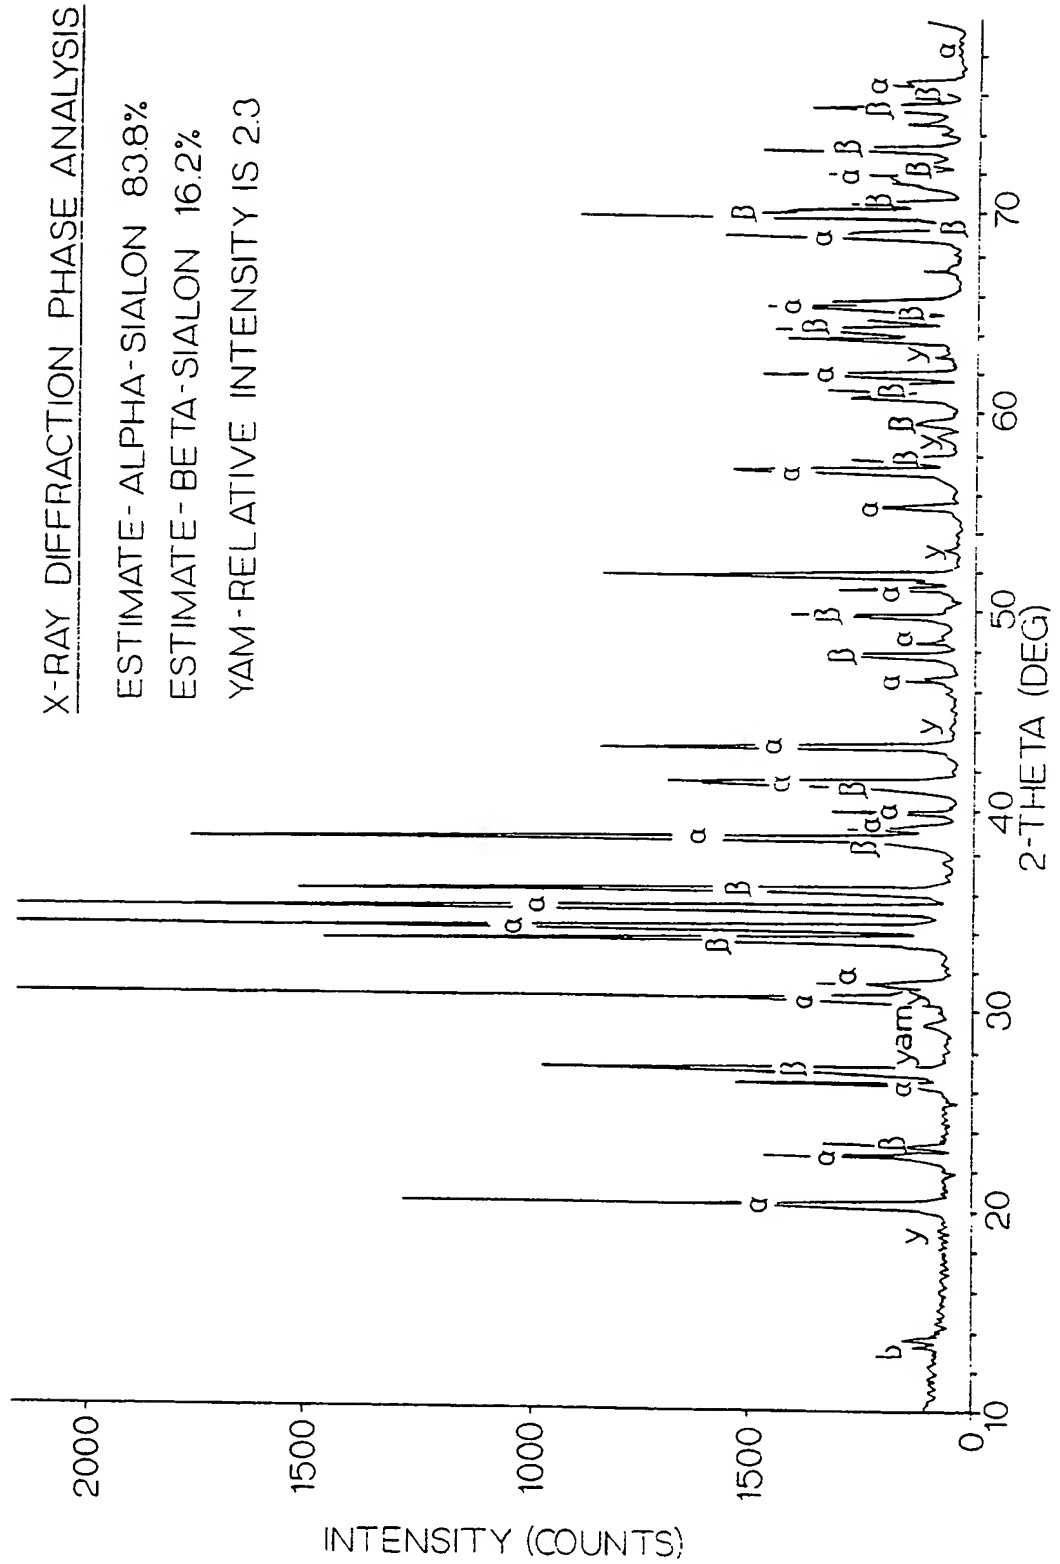


FIG. 16

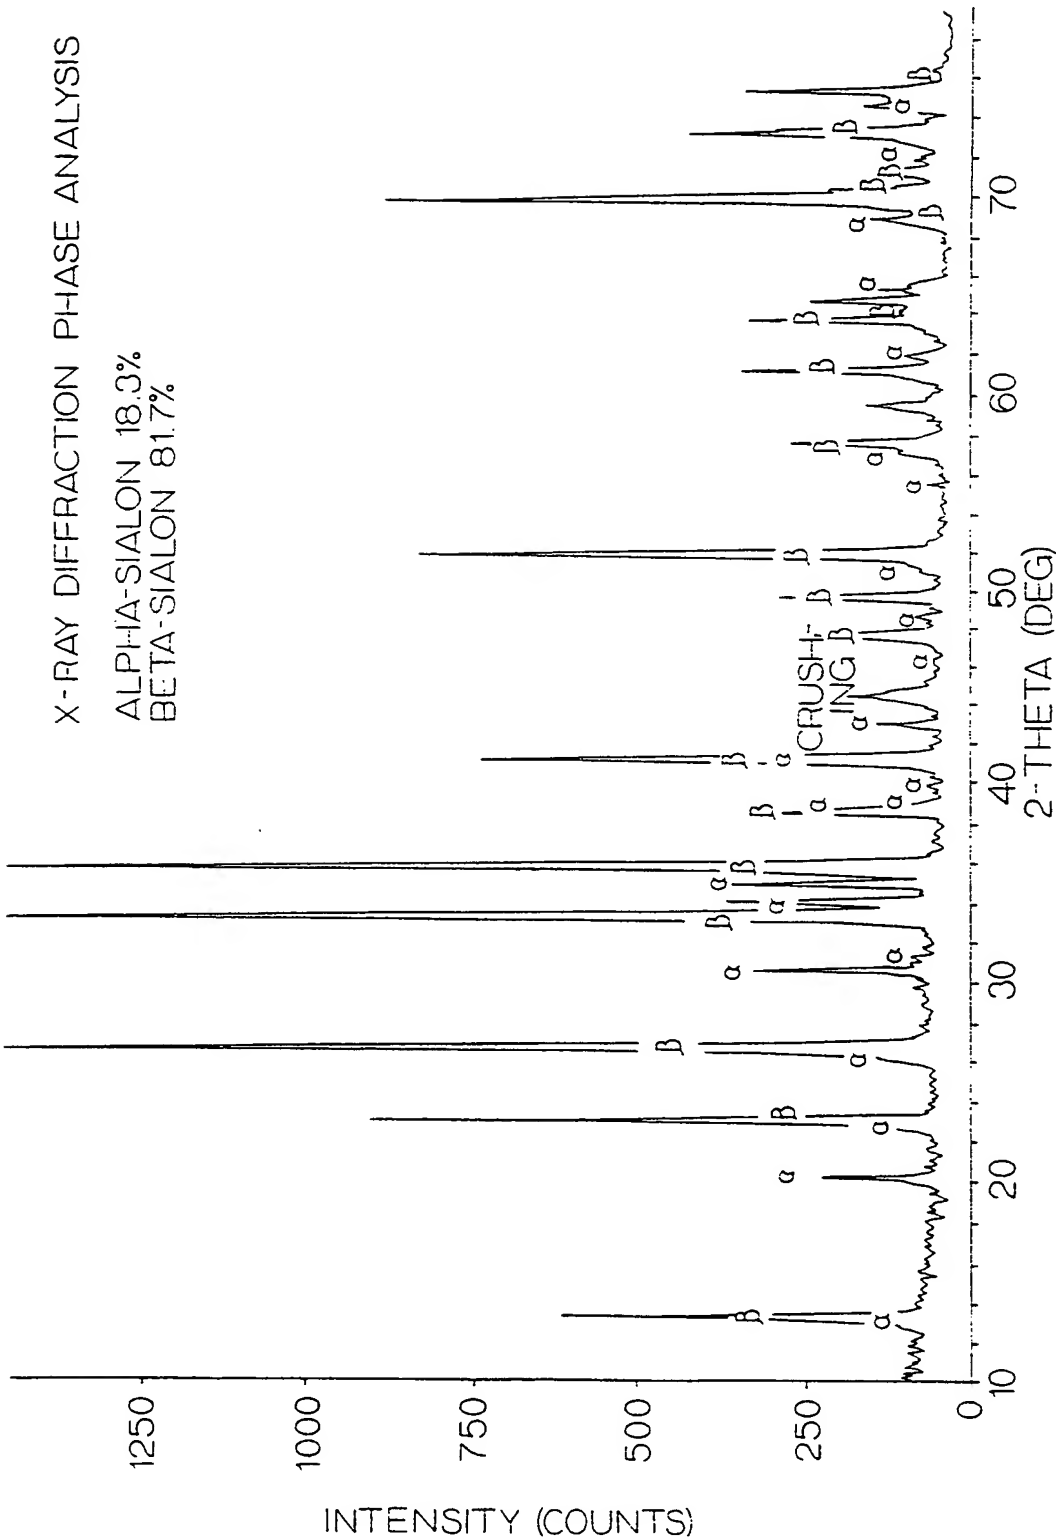


FIG. 17

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : C04B 35/58, F27B 9/24, F27D 3/12</p>	<p>A3</p>	<p>(11) International Publication Number: WO 00/02829 (43) International Publication Date: 20 January 2000 (20.01.00)</p>
<p>(21) International Application Number: PCT/US99/14231 (22) International Filing Date: 23 June 1999 (23.06.99) (30) Priority Data: 09/112,639 9 July 1998 (09.07.98) US (71) Applicant: KENNAMETAL INC. [US/US]; P.O. Box 231, Latrobe, PA 15650-0231 (US). (72) Inventor: YECKLEY, Russell, L.; 110 Branwell Drive, Latrobe, PA 15650 (US). (74) Agents: PRIZZI, John, J. et al.; Kennametal Inc., P.O. Box 231, Latrobe, PA 15650-0231 (US).</p>		<p>(81) Designated States: BR, CA, IL, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> (88) Date of publication of the international search report: 17 August 2000 (17.08.00)</p>
<p>(54) Title: CERAMIC AND PROCESS FOR THE CONTINUOUS SINTERING THEREOF</p> <div data-bbox="397 1176 1404 1732"></div> <p>(57) Abstract</p> <p>A continuous process for the manufacture of a ceramic sintered comcompact wherein the process comprises the steps of: forming a green compact from a powder mixture comprising a first component comprising compounds which contain elements of silicon, aluminum, oxygen and nitrogen; and the powder mixture further comprising a second component comprising a compound of at least one element selected from the group consisting of yttrium, scandium, cerium, lanthanum and the metals of the lanthanide series, and the second component comprising between 0.1 and 10 weight percent of the powder mixture; heat treating the green compact wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to produce a sintered compact.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/14231

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C04B35/58 F27B9/24 F27D3/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C04B F27B F27D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 648 042 A (MILLER JR CHARLES W) 15 July 1997 (1997-07-15) column 5, line 3 - line 46; figure 1 abstract	1-49
Y	US 5 370 716 A (MEHROTRA PANKAJ K ET AL) 6 December 1994 (1994-12-06) column 1, line 26 - line 39 column 1, line 53 - column 2, line 15 column 3, line 19 - column 4, line 43 column 9, line 33 - line 36; figure 1 abstract	1-49
A	EP 0 796 828 A (SANDVIK AB) 24 September 1997 (1997-09-24) the whole document	1-49

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

8 May 2000

Date of mailing of the international search report

09.06.00

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ulrika Nilsson/MP

INTERNATIONAL SEARCH REPORT

Inter national Application No
PCT/US 99/14231

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 382 273 A (MEHROTRA PANKAJ K ET AL) 17 January 1995 (1995-01-17) the whole document ---	1-49
A	US 4 563 433 A (YECKLEY RUSSELL L ET AL) 7 January 1986 (1986-01-07) figure A ---	1-49
A	US 5 525 134 A (MEHROTRA PANKAJ K ET AL) 11 June 1996 (1996-06-11) the whole document ---	1-49
A	WO 82 03072 A (BUCHTAL GMBH ;CREMER GOTTFRIED (DE)) 16 September 1982 (1982-09-16) abstract ---	1-49
A	WO 98 23554 A (UNIV MICHIGAN ;CHEN I WEI (US); ROSENFLANZ ANATOLY (US)) 4 June 1998 (1998-06-04) abstract ---	1-49
A	US 5 413 972 A (HWANG CHINMAU J ET AL) 9 May 1995 (1995-05-09) abstract ---	1-49
A	US 5 227 346 A (HWANG CHINMAU J ET AL) 13 July 1993 (1993-07-13) abstract -----	1-49

INTERNATIONAL SEARCH REPORT

Int. application No.
PCT/US 99/14231

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-27

relates to a continuous process for the manufacture of a ceramic sintered compact. The invention is characterised by the steps of forming a green compact from a powder mixture.

2. Claims: 28-35

relates to a continuous process for the manufacture of a ceramic sintered compact. The invention is characterised by the phases of the ceramic.

3. Claims: 36-39

relates to a ceramic cutting insert. The invention is characterised by the shape of its faces where at least one face does not have a surface reaction layer.

4. Claims: 40-43

relates to a ceramic cutting insert. The invention is characterised by its microstructure.

5. Claims: 44-49

relates to a sintered ceramic body. The invention is characterised by its composition and surface region.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/14231

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5648042	A	15-07-1997	US 5900208 A	04-05-1999
US 5370716	A	06-12-1994	AU 673546 B	14-11-1996
			AU 5094493 A	22-06-1994
			CA 2146662 A,C	09-06-1994
			JP 2824701 B	18-11-1998
			JP 8510965 T	19-11-1996
			WO 9412317 A	09-06-1994
EP 0796828	A	24-09-1997	SE 506151 C	17-11-1997
			JP 10036174 A	10-02-1998
			SE 9601058 A	19-09-1997
			US 6043176 A	28-03-2000
US 5382273	A	17-01-1995	AT 184867 T	15-10-1999
			AU 671349 B	22-08-1996
			AU 5846994 A	15-08-1994
			DE 69326562 D	28-10-1999
			DE 69326562 T	24-02-2000
			DE 679174 T	12-09-1996
			EP 0679174 A	02-11-1995
			EP 0916633 A	19-05-1999
			ES 2079334 T	16-01-1996
			ES 2133266 T	16-09-1999
			JP 2997899 B	11-01-2000
			JP 8503664 T	23-04-1996
			RU 2110369 C	10-05-1998
			WO 9416023 A	21-07-1994
			US 5525134 A	11-06-1996
US 4563433	A	07-01-1986	AT 389870 B	12-02-1990
			AT 60583 A	15-07-1989
			CA 1201131 A	25-02-1986
			CH 654285 A	14-02-1986
			DE 3306157 A	15-09-1983
			GB 2118927 A,B	09-11-1983
			IT 1193681 B	21-07-1988
			SE 452002 B	09-11-1987
			SE 8300928 A	23-08-1983
			AU 565033 B	03-09-1987
			AU 1174883 A	01-09-1983
			BE 895972 A	16-06-1983
			FR 2521983 A	26-08-1983
			JP 1633599 C	20-01-1992
			JP 58204875 A	29-11-1983
			JP 63035594 B	15-07-1988
			JP 1968234 C	18-09-1995
			JP 4049510 B	11-08-1992
			JP 63233082 A	28-09-1988
			MX 158265 A	18-01-1989
			US 4711644 A	08-12-1987
US 5525134	A	11-06-1996	US 5382273 A	17-01-1995
			AT 184867 T	15-10-1999
			AU 671349 B	22-08-1996
			AU 5846994 A	15-08-1994
			DE 69326562 D	28-10-1999
			DE 69326562 T	24-02-2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/14231


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5525134 A		DE 679174 T	12-09-1996
		EP 0679174 A	02-11-1995
		EP 0916633 A	19-05-1999
		ES 2079334 T	16-01-1996
		ES 2133266 T	16-09-1999
		JP 2997899 B	11-01-2000
		JP 8503664 T	23-04-1996
		RU 2110369 C	10-05-1998
		WO 9416023 A	21-07-1994
WO 8203072 A	16-09-1982	DE 3108325 A	16-09-1982
		DE 3261873 D	28-02-1985
		EP 0059849 A	15-09-1982
		JP 58500325 T	03-03-1983
		US 4488871 A	18-12-1984
		ZA 8201246 A	30-03-1983
WO 9823554 A	04-06-1998	AU 5587798 A	22-06-1998
		US 5908798 A	01-06-1999
US 5413972 A	09-05-1995	DE 69407624 D	05-02-1998
		DE 69407624 T	09-04-1998
		EP 0735988 A	09-10-1996
		JP 9506852 T	08-07-1997
		WO 9517357 A	29-06-1995
US 5227346 A	13-07-1993	DE 69309664 D	15-05-1997
		DE 69309664 T	24-07-1997
		EP 0629181 A	21-12-1994
		JP 7504394 T	18-05-1995
		WO 9317981 A	16-09-1993



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : C04B 35/58, F27B 9/24, F27D 3/12	A3	(11) International Publication Number: WO 00/02829 (43) International Publication Date: 20 January 2000 (20.01.00)
(21) International Application Number: PCT/US99/14231 (22) International Filing Date: 23 June 1999 (23.06.99) (30) Priority Data: 09/112,639 9 July 1998 (09.07.98) US (71) Applicant: KENNAMETAL INC. [US/US]; P.O. Box 231, Latrobe, PA 15650-0231 (US). (72) Inventor: YECKLEY, Russell, L.; 110 Branwell Drive, Latrobe, PA 15650 (US). (74) Agents: PRIZZI, John, J. et al.; Kennametal Inc., P.O. Box 231, Latrobe, PA 15650-0231 (US).	(81) Designated States: BR, CA, IL, JP, KR, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report, With amended claims. (88) Date of publication of the international search report: 17 August 2000 (17.08.00) Date of publication of the amended claims: 5 October 2000 (05.10.00)	

(54) Title: CERAMIC AND PROCESS FOR THE CONTINUOUS SINTERING THEREOF

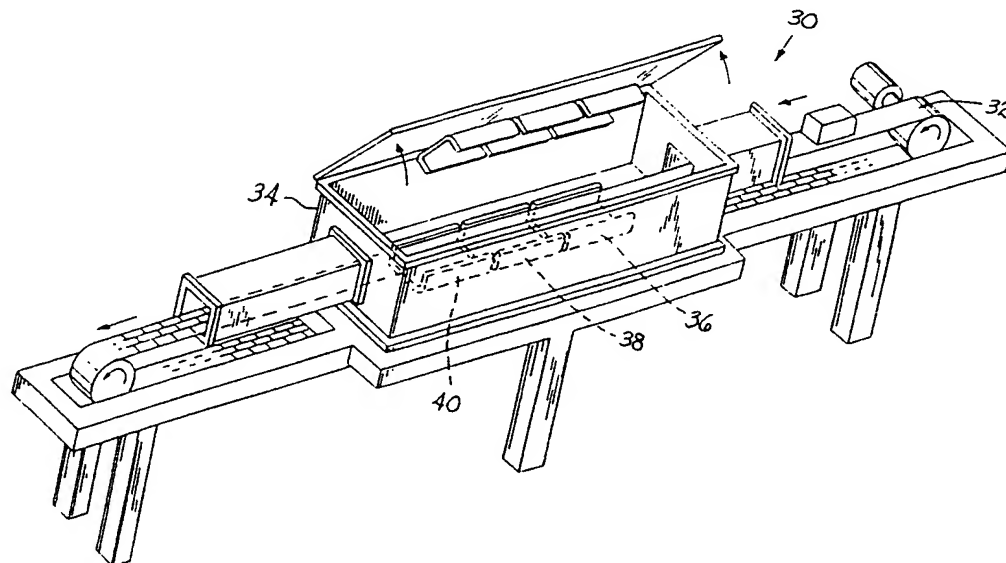

(57) Abstract

A continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of: forming a green compact from a powder mixture comprising a first component comprising compounds which contain elements of silicon, aluminum, oxygen and nitrogen; and the powder mixture further comprising a second component comprising a compound of at least one element selected from the group consisting of yttrium, scandium, cerium, lanthanum and the metals of the lanthanide series, and the second component comprising between 0.1 and 10 weight percent of the powder mixture; heat treating the green compact wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to produce a sintered compact.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

AMENDED CLAIMS

[received by the International Bureau on 27 July 2000 (27.07.00);
original claims 1-35 amended; remaining claims unchanged (9 pages)]

1. A continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of:

5 forming a green compact from a powder mixture comprising a first component comprising compounds which contain elements of silicon, aluminum, oxygen and nitrogen; and the powder mixture further comprising a second component comprising a compound of
10 at least one element selected from the group consisting of yttrium, scandium, cerium, lanthanum and the metals of the lanthanide series, and the second component comprising between 0.1 and 10 weight percent of the powder mixture;

15 heat treating the green compact wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to produce a sintered compact, and wherein the one heating zone is at a temperature of greater than or
20 equal to about 1700 degrees Centigrade.

2. The process according to claim 1 wherein the ceramic material comprising a two-phase composite of alpha'-SiAlON phase and beta'-SiAlON phase, and a glassy phase; and

25 wherein the alpha'-SiAlON phase ranges from 10 to 70 weight percent of the ceramic material, the beta'-SiAlON phase ranges from 20 to 90 weight percent of the ceramic material, and the glassy phase ranges from 0.1 to 10 weight percent of the ceramic
30 material.

3. The process according to claim 2 wherein the glassy phase may also contain a crystalline phase from the group consisting of YAG, YAM, N-YAM, and Y-N- α -Wollastonite.

-46-

4. The process according to claim 2 wherein the glassy phase is free of dispersed particles, and the ceramic material has the following physical properties: a fracture toughness between about 5.93 and about 6.69 MPa m^{1/2}, a hardness of between about 15.68 and about 16.30 GPa, and a density of between about 3.24 and about 3.26 grams per cubic centimeter.

5. The process according to claim 2 wherein the beta'-SiAlON phase has the formula Si_{6-z}Al₂O₂N_{8-z} wherein z ranges between 0.38 and 1.5.

6. The process according to claim 5 wherein z is equal to about 0.8.

7. The process according to claim 1 wherein the heating zone is at a temperature between about 1700 °C and about 1800 °C and the green compact is in the heating zone for a time between about sixty minutes and one hundred twenty minutes.

8. The process according to claim 1 wherein the forming step comprises: milling the powder components; agglomerating the powder components with lubricant; and compacting the lubricant-agglomerated powder mixture into a green compact.

9. The process according to claim 8 wherein prior to the heat treating step, there is the step of delubing the green compact.

10. The process according to claim 9 wherein the green compact moves continuously from the delubing step to the heat treating step.

11. The process according to claim 1 wherein prior to the heat treating step, the green compact is placed in a container without any setting powder; and the container carrying the green compact is placed on a

-47-

belt which passes the container and green compact through the one heating zone.

5 12. The process according to claim 11 wherein the belt moves at a linear speed so as to control the duration of the green compact in the one heating zone.

13. The process according to claim 1 wherein the heat treatment further comprises subjecting the green compact to one atmosphere of flowing nitrogen.

10 14. The process according to claim 1 wherein the ceramic material comprises SiAlON grains and an intergranular phase disposed between the SiAlON grains, wherein the SiAlON grains comprises at least 50 volume percent of the ceramic;

15 wherein the ceramic has less than 1 volume percent porosity;

 wherein at least 70 volume percent of the SiAlON is beta'-SiAlON phase and the intergranular phase form 5 to 15 volume percent of the ceramic; and

20 wherein the beta'-SiAlON phase has a Z value of greater than 0.4 but less than 4.

15. The process according to claim 14 wherein the Z value of the beta'-SiAlON phase is about 3.

25 16. The process according to claim 14 wherein the glassy phase is free of dispersed particles, and the ceramic has the following physical properties: a K_{IC} fracture toughness between 5.70 and 6.01 MPa $m^{1/2}$, a hardness of between 14.66 and 15.10 GPa, and a density of between 3.18 and 3.19 grams per cubic centimeter.

17. The process according to claim 14 wherein the intergranular phase of the ceramic sintered

-48-

compact comprises glass pockets; and at least ninety percent of the glass pockets have a major dimension being less than or equal to one micron.

5 18. The process according to claim 14 wherein the intergranular phase of the ceramic comprises glass pockets; and the glass pockets having a uniform distribution.

10 19. The process according to claim 14 wherein the beta'-SiAlON phase comprises at least about 85 volume percent of the SiAlON.

20 20. The process according to claim 14 wherein the beta'-SiAlON phase comprises about 100 volume percent of the SiAlON.

15 21. The process according to claim 14 wherein the ceramic material includes one or refractory materials selected from the group consisting of titanium nitride, titanium carbonitride, titanium carbide, hafnium nitride, hafnium carbonitride, hafnium carbide, zirconium nitride, zirconium carbonitride, and
20 zirconium carbide.

22. The process according to claim 1 wherein the sintered compact does not have a surface reaction layer.

25 23. The process according to claim 1 wherein the sintered compact has a surface reaction layer with a depth of no greater than .005 inches.

24. The process according to claim 1 further including the step of treating the sintered compact to form a cutting insert.

30 25. The process according to claim 24 further including the step of coating at least a

-49-

portion of the cutting insert with a refractory coating.

26. The process according to claim 25 wherein the refractory coating is selected from the group consisting of alumina, titanium nitride and titanium carbonitride.

27. The process according to claim 14 wherein z is equal to about 0.4.

28. The process according to claim 1 wherein the subjecting step includes continuously passing the green compact through at least two heating zones so as to form the sintered compact, and wherein each one of the heating zones is at a temperature greater than or equal to about 1700 degrees Centigrade.

29. A continuous process for the manufacture of a ceramic sintered compact wherein the process comprises the steps of:

forming a green compact from a powder mixture of silicon nitride and one or more sintering aids, and wherein the sintering aids comprise magnesia and yttria, and the ceramic has at least 0.2 weight percent yttria and at least 0.2 weight percent magnesia wherein the sum of the yttria and the magnesia is less than 5 weight percent, and wherein the ceramic has 1.3 weight percent to 2.2 weight percent oxygen;

subjecting the green compact to a heat treatment wherein the heat treatment comprises continuously passing the green compact through at least one heating zone so as to form the sintered compact and wherein the heating zone is at a temperature greater than 1750 °C; and

the ceramic comprising a beta-silicon nitride phase and an intergranular phase.

-50-

30. The process according to claim 29 wherein the green compact is in the heating zone for a time between about sixty minutes and one hundred twenty minutes.

5 31. The process according to claim 30 wherein the ceramic has a density of at least 3.19 grams per cubic centimeter.

10 32. The process according to claim 30 wherein the ceramic has less than about 0.2 volume percent porosity.

15 33. The process according to claim 29 wherein the ceramic includes between about 1 to about 35 volume percent of one or more refractory materials selected from the group consisting of the nitrides, carbonitrides, and carbides of titanium, hafnium and zirconium, and tungsten carbide, and mixtures thereof.

20 34. The process according to claim 29 further including the step of coating at least a portion of the sintered compact with a refractory material.

35. The process according to claim 34 wherein the refractory coating is selected from the group consisting of alumina, titanium nitride, and titanium carbonitride.

25 36. A ceramic cutting insert comprising:
a cutting insert body having an as-molded rake face and an as-molded flank face, and the rake face intersecting with the flank face to form a cutting edge at the intersection; and
30 the cutting body having at least one of the as-molded rake face and the as-molded flank face does not have a surface reaction layer.

-51-

37. The ceramic cutting insert according to claim 36 wherein at least one of the as-molded rake face and as-molded flank face has a surface reaction layer to a depth of no greater than .005 inches.

5 38. The ceramic cutting insert according to claim 36 wherein the ceramic material comprising a two-phase composite of alpha'-SiAlON phase and beta'-SiAlON phase, and a glassy phase; and wherein the alpha'-
10 SiAlON phase ranges from 10 to 70 weight percent of the ceramic material, the beta'-SiAlON phase ranges from 20 to 90 weight percent of the ceramic material, and the glassy phase ranges from 0.1 to 10 weight percent of the ceramic material.

15 39. The ceramic cutting insert according to claim 36 wherein the ceramic material comprises SiAlON grains and an intergranular phase disposed between the SiAlON grains, wherein the SiAlON grains comprises at least 50 volume percent of the ceramic; wherein the ceramic has less than 1 volume percent porosity;
20 wherein at least 70 volume percent of the SiAlON is beta'-SiAlON phase and the intergranular phase form 5 to 15 volume percent of the ceramic; and wherein the beta'-SiAlON phase has a Z value of greater than 0.4 but less than 4.

25 40. A ceramic cutting insert comprising:
 a cutting insert body, and the cutting insert body having a microstructure including pockets of a glassy phase; and wherein at least ninety percent of the pockets of the glassy phase have a major axis
30 which is of a dimension of one micron or less.

41. The ceramic cutting insert according to claim 40 wherein the ceramic material comprising a two-phase composite of alpha'-SiAlON phase and beta'-SiAlON phase, and a glassy phase; and wherein the alpha'-

-52-

SiAlON phase ranges from 10 to 70 weight percent of the ceramic material, the beta'-SiAlON phase ranges from 20 to 90 weight percent of the ceramic material, and the glassy phase ranges from 0.1 to 10 weight percent of the ceramic material.

42. The ceramic cutting insert according to claim 40 wherein the ceramic material comprises SiAlON grains and an intergranular phase disposed between the SiAlON grains, wherein the SiAlON grains comprises at least 50 volume percent of the ceramic; wherein the ceramic has less than 1 volume percent porosity;

wherein at least 70 volume percent of the SiAlON is beta'-SiAlON phase and the intergranular phase form 5 to 15 volume percent of the ceramic; and wherein the beta'-SiAlON phase has a Z value of greater than 0.4 but less than 4.

43. The ceramic cutting insert according to claim 40 wherein the cutting insert body has a coating of a refractory material thereon, and the refracting material being selected from the group consisting of alumina, titanium nitride, and titanium carbonitride.

44. A sintered ceramic body comprising a substrate comprising a two-phase composite of alpha'-SiAlON and beta'SiAlON, and a glassy phase;

the substrate presenting a surface, the substrate having a surface region extending inwardly from the surface, and the substrate having a bulk region beneath the surface region; and

the surface region having a higher alpha'-SiAlON content than the bulk region.

45. The sintered ceramic body according to claim 44 wherein the content of alpha'-SiAlON in the surface region is between about two hundred percent to

-53-

about five hundred percent greater than the alpha'-SiAlON content in the bulk region.

5 46. The sintered ceramic body according to claim 44 wherein the alpha'-SiAlON content in the surface region ranges between about 57 weight percent and about 92 weight percent, and the alpha'-SiAlON content in the bulk region comprises about 20 weight percent.

10 47. The sintered ceramic body according to claim 44 wherein the surface region includes beta'-SiAlON, and the beta'-SiAlON content in the surface region being less than the beta'-SiAlON content in the bulk region.

15 48. The sintered ceramic body according to claim 44 wherein the surface region includes the glassy phase.

20 49. The sintered ceramic body according to claim 44 wherein the substrate has a coating of refractory material thereon, and the refractory material being selected from the group consisting of alumina, titanium nitride, and titanium carbonitride.